

Suzuki Carry & Every

English Version

Factory Service Manual Translation



F6A Series 660cc
Engine &
Parts Manual
Second Edition

James L. Danko

DE51V
DF51V
DC51T
DD51T
DC51B
DA52T
DB52T
DA52V

Suzuki Carry & Every
English Version
Factory Service Manual Translation
F6A Engine Manual
Carry Truck 660cc
2WD &4WD
Every Van 660cc
AT-MT Models
Suzuki Kei Vehicles Series

Written By,
James Danko

Second Edition 2008

Copyright © 2008 by James Danko

All rights reserved. All text and graphics in this publication if the author, unless otherwise noted or credited. It is unlawful to reproduce-or copy in anyway-resell, or redistribute this information without the express written permission of the publisher.

This book is an independent publication, and the author and/or publisher thereof are not in anyway associated with, and are not authorized to act on behalf of any of the manufactures listed in this book. All registered trademarks are the property of their owners. The publisher reserves the right to revise this publication or change its content from time to time without obligation to notify any persons of such revision or changes.

Edited By: James L. Danko

Artwork: James L. Danko©

Layout By: James L. Danko

Printed in U.S.A

Yokohama Motors Japan is a solely owned division of Nippon Security Inc. Yokohama Motors is a licensed new & used import/export automotive dealer based in Yokohama Japan. For more information please visit www.yokohamamotors.com

All translations from original Japanese text to English completed by James Danko.

Disclaimer: All translations from one language to another can involve technical errors. The author has found mistakes in the original Japanese text. The best suitable English vocabulary has been chosen by the author.

Credits: I would like to thank the Suzuki Motors Corporation (Japan) for their part in supplying required information.

Suzuki™ Carry© and Every© and all copyrights of said trademarks are property of Suzuki Corp, Japan.

Introduction

Due to the high request for English version manuals on Japanese mini trucks & Vans, we are publishing wide variety information to provide the mini truck community with the ability to maintain their vehicles.

Japanese mini trucks & vans are produced only for the Japanese market. Therefore, all original manuals are only available in Japanese.

Service manuals are not sold to the public in Japan, as in many countries. You must be a new car dealer to receive them. We have a few hundred in stock. We do not sell manuals from our own library. We will start publishing them in English (Translated) and our own original versions.

This book or manual is for the professional mechanic. Simple items as how to change a spark plug, or an air-filter are not in this book. It is full of diagrams and schematics that are easily understood by a professional mechanic. How to do an engine overhaul using the correct parts sizes, measurements, torque, etc. You will have the same information as the Suzuki Factory techs have.

We have manuals for all Japanese manufactures. It's a time consuming process, please check back frequently as we post more information.

For more information please visit our home page at www.yokohamamotors.com

Contents

1. Vehicle Types
2. Jacking Positions
3. VIN Decoding
4. Engine and Transmission Identification
5. Service Data and Specifications
6. Tools (OEM)
7. Engine Mounts and Frame Diagrams
8. Engine Removal
9. Intake Manifold Carry (Carbureted)
10. Intake Manifold Every Van (Carbureted)
11. Intake Manifold (Throttle Body)
12. Timing Belt Parts and Part Numbers
13. Timing Belt Tensioner Truck & Van
14. Timing Belt Replacement Truck & Van
15. Valve Lash 2 Cylinder
16. Valve Lash 4 Cylinder
17. Oil
18. Oil System Pressure Testing
19. Oil Pump Removal-Replacement
20. Cylinder Head 2 Valve Overhaul
21. Pistons Connecting Rods Cylinder Block
22. Main Bearings, Crankshaft, Cylinder Block
23. Crankshaft Inspection, Oil Seal, Flywheel
24. Parts Section
25. Conversion Charts

Suzuki Carry Truck 2WD & 4WD

DC51T



DD51T



Suzuki Every Van

DE51V



DE51V



DF51V




DF51V




Jacking Locations

Van

Front




Rear

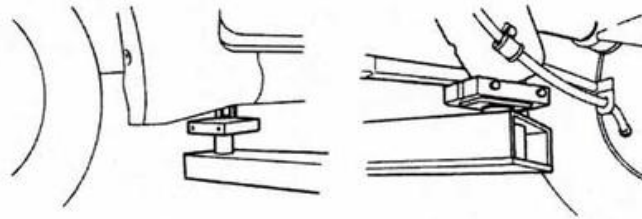


Truck

Front

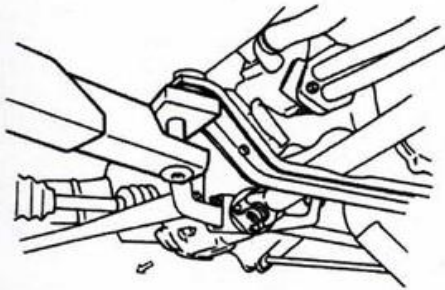

Rear

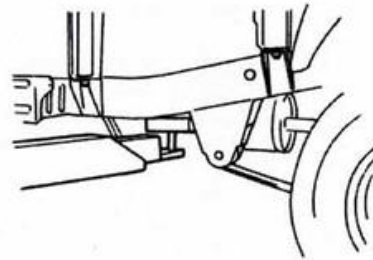


Rear


Front



Rear




Axle




Floor Jack Locations

Front


2WD

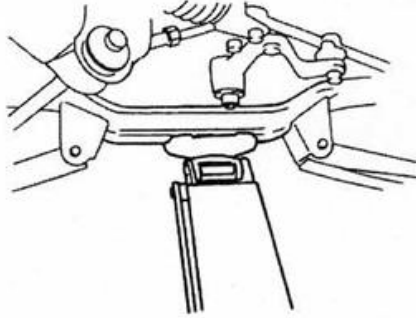


4WD

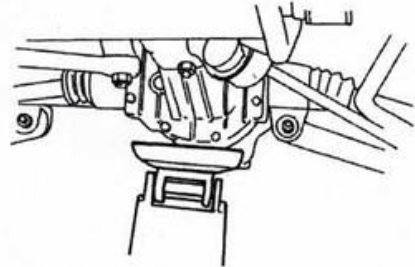


Rear
Van

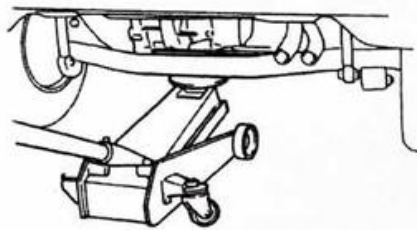

Truck

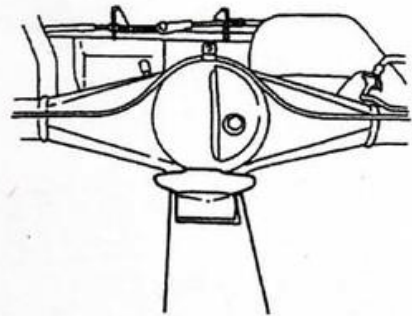

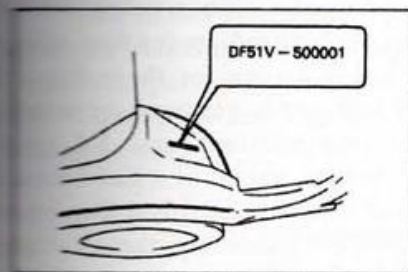

Drivers Side Inner Fender
Under Seat

Example: DE51V=Vehicle Series
500001=Production number
In Sequence

Every Van

DE51V-500001

DF51V-500001


Carry Truck

DC51T-100001~


DD51T-100001~

DC51B-100001~

Other Locations of ID Plates

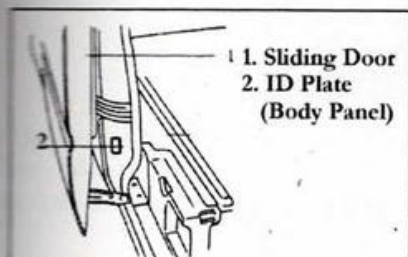

2. (R) Front Door

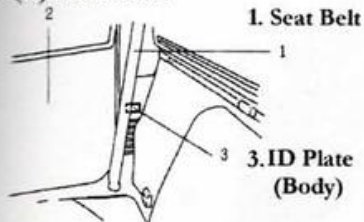

Note: Model Years do not exist in Japan, only Series.

Example: Car Manufactured in 2000 but not sold
until 2008=2008. Therefore, vehicles go
by codes and manufactures date means
nothing in Japan.

*Note: For manufactured year check the seat belt tag or
any paperwork you have from your dealer.

ID Plate Decoder

1. Vehicle Series
2. Vehicle VIN Number
3. Engine Series
4. Engine True Size(cc)
5. Body Color Code
6. Interior Color Code or Package Code
7. Makers Code (For Sales Dept. Information)
8. Suzuki Corporation(Japanese)

SUZUKI MOTOR CORPORATION JAPAN	
TYPE	V-DE51V
CHASSIS NO.	DE51V-500001
ENGINE	F6A 657cc
COLOR	26U C61
ENGINE NO.	
スズキ株式会社	
Yokohama Motors	

The Suzuki Carry has been a work horse in Japan for decades. Officially it is classified as a □□□□ (Kei-vehicle or Light Vehicle) which is symbolized by the unique yellow license plates they use for registration. All Kei-vehicles must be manufactured under law with a maximum 660cc engine displacement. Due to the obvious safety issues for their size and weight they are designed for a maximum highway speed of 80 kilometers per hour, or roughly 50MPH. Although recently with the addition of five speed transmissions and 3-4 speed automatics it is possible to travel at greater speeds. Since the average length of a Kei-Truck is roughly 10.2 feet it is not a good idea to push them to the limit as safety of drivability issues will arise. Average use in Japan for agricultural purposes and off road durability, these vehicles generally travel at 25MPH (40KPH) on local roads. As Japan is an island nation, roads are small and narrow. Kei-trucks are rarely seen going down the highway for long distance travel. The other issues of engines overheating at prolonged highway speeds. Their high winding motors do not have adequate cooling systems for long distance travel.

The Suzuki Carry is built tough and properly maintained will last for many years. The platform is durable, and easy to repair. There are still thousands of them driving around Japan that are 20-30 years old. This in itself amazing as the average life cycle of a normal car in Japan is 5-10 years.

Common uses in Japan of Carry Truck and Every Van


- Agriculture
- Construction companies
- Dump trucks
- Delivery Vans (Every Van)
- Postal
- Rescue and fire trucks
- Police Patrol
- Moving companies
- Many, many more

The basic body style has not changed much from the 1980s to 1998. The engines from the late 1970s to the beginning of 1980s saw the change from the 550cc engine to the 660cc version. Some makers in the 1980s started producing engines with either superchargers or turbochargers. Turbochargers and superchargers were not used that much on trucks but heavily on vans. Since vans we designed for on-road conditions and mostly delivery, they got the boost. Off road trucks could use the boost in power but due to dirty conditions and the chance of dirt in a turbo would provide disaster for the engine.

Vehicle Identification

One of the most highly requested questions we get at Yokohama Motors from overseas customers (remember, I'm in Japan) is what is my vehicle? What year is it? Is it a Suzuki or a Honda? Are parts interchangeable? Can I get parts from a Suzuki dealer in Kansas? After 30 years of questions I'm writing this book hoping to eliminate or at least lessen the amount of email requests.

VIN Plate

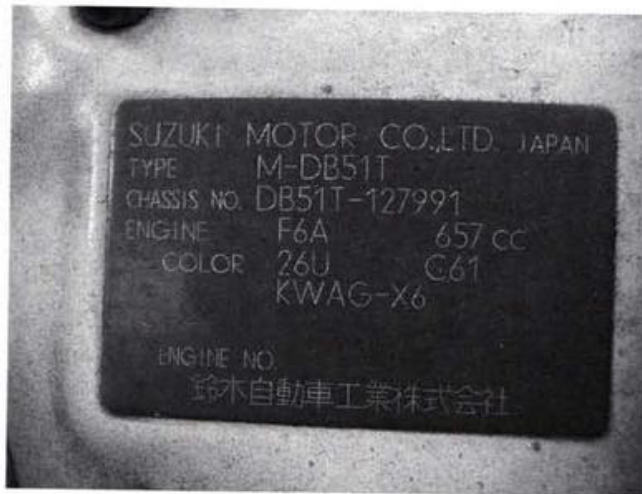

All Japanese vehicles have at least two ways to determine its identity. One is the standard VIN plate. Sometimes the VIN plate is attached by glue, screws, or rivets. If your plate is missing you will also find a permanent stamped VIN code on the body (Near or Under Drivers Seat).

VIN Stamp



This body stamp just happens to be next to the ID plate. This is not always the case. It can be located almost anywhere as there is no set rule for this marking. Most common is under the driver's seat in the engine compartment or around the kick-panel on the passenger side. You will also notice that neither picture indicates the production year. That's because in Japan we don't specifically have a year! Totally confused now? A model year is not used, per say in

Japan. If I buy the same vehicle in December, 2007 it is a 2007. If I bought a car that was manufactured in 2006 and didn't register it until 2008 it is a 2008 car. To make it even more confusing, if I import a 1969 Camaro to Japan today and register it, it is a 2008 Camaro.

Instead of model years as the western world is used to, Japanese makers identify vehicles by code. The code will tell the parts supplier of mechanic everything about the vehicle. There is no room for error; for example between a 1996 or a 1997. We don't have a California or a New York version. A code tells all about the vehicle, period.

If you really want to know the vehicles manufactured year and you do not have a copy of the Japanese registration, look at the seatbelt tag. But remember, when ordering parts the year will have nothing to do with it.

Mistaken Identity

Note:* We have had people call for help and to their surprise found out their Suzuki was really a Mitsubishi! Not all vehicle name plates have English names on them! Use the chart below to correctly identify your truck!

Note* Japanese can spell names up to four different ways. Listed bellow is the most common.


Manufactures Names

□□ or □□□	Suzuki	□□ or □□□	Isuzu
□□□	Toyota	□□□ or □□	Honda
□□□□	Daihatsu	□□	Mitsubishi
□□ or □□□□	Nissan	□□□	Subaru
□□□	Mazda	□□□	Yamaha


Common Japanese terms on paperwork

□□□ (Shakenshou)	Title or registration
□□□□ (kabushikikaisha)	Corporation
□□□□ (shadaibangou)	VIN
□□ (nenshiki)	Year of manufacture- (Not model year)
□□ (katashiki)	Vehicle designation code(model)
□ (iro)	Color

Engine & Transmission Identification Location

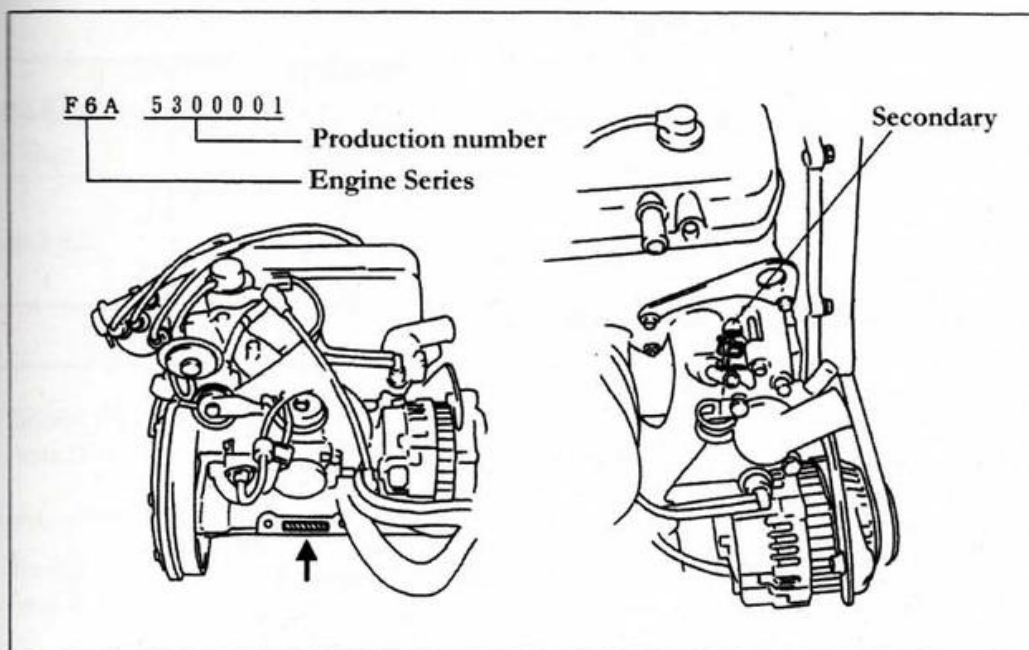

Automatic Transmission ID plate

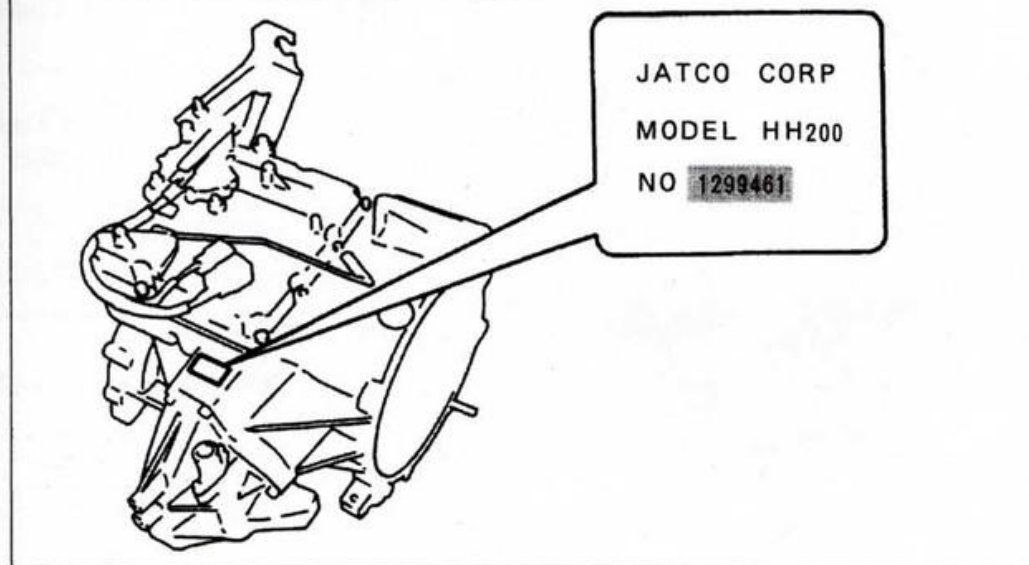

Service Data- Carry Truck and Every Van

Fuel Capacity (Liters)	Carry Truck 36L Every Van 37L		Conversion 1.0 Liter= 0.264 Gallon		
Engine Oil Requirements	Maximum 5000Km 3125 Miles	All Models 10W-30	Capacity		
			2.9 Liters		
Oil Filter Change 10,000 Km (Harsh conditions 2500Km)					
Transmission Oil	MT	2 Years or 20,000Km	Gear Oil #90 Suzuki (GL-4)	2WD	4 Speed 1.1Liter
					5 Speed 1.2Liter
				4WD	Part Time 2.6 Liter
					Full Time 2.8 Liter
	AT	2 Years or 40,000Km	Suzuki AT oil 5D06	Normal	Cp 2.6L
				Turbo	Cp 2.8L
Differential	2 Years or 20,000Km	75W-80 (GL-5)	2WD	Normal	1.0L
				Turbo	1.3L
			4WD Part Time	Front	0.7L
				Rear	1.0L
			4WD Full Time	Front	0.7L
				Rear	1.3L

Spark Plug & Gap	Turbo	ND	W16EXR-U	GAP (Millimeters) 0.7 to 0.8mm
		NGK	BPR5E	
	Normal	ND	XU22EPR-U	0.8 to 0.9mm
		NGK	DCPR7E	

Battery	Normal	Part # 28B19R (Right positive connection)
	AC Equipped Also Refrigerated Trucks	Part # 38B20B












Ignition Timing

Carburetor Vehicles	Injection and Turbo Charged
Idle 950+-50 7 Degrees BTDC	Non-Turbo Idle 900+-50 Turbo Charged 950+-50 5 Degrees BTDC












Note: See Vehicle Tag Mounted in Engine Room for Specific Details

My Car Notes:


Suzuki Factory Tool Part Numbers

 <p>09915-47340 Oil Filter Wrench Socket</p>	 <p>1. 09916-14510 Compressor 2 Valve : 09916-48210 4 Valve : 09916-14910</p>	 <p>4 Valve : 09916-44310 2 Valve : 09916-44910 Valve Guide Remover</p>	 <p>4 Valve : 09916-57340 2 Valve : 09917-88230 Valve Guide Installer Socket</p>
 <p>4 Valve : 09916-57330 Others : 09916-58210 Valve Guide Installer</p>	 <p>Reamer 2 Valve : 09916-38220(5.5mm) 4 Valve : 09916-34570(5mm)</p>	 <p>Reamer 2 Valve : 09916-38210(11mm) 4 Valve : 09916-37320(10.5mm)</p>	 <p>09916-34541 Reamer Handle</p>
 <p>09916-77310 Spring Compressor</p>	 <p>09918-08210 Vacume Hose Joint</p>	 <p>09900-00410 Hexagon Wrench</p>	 <p>09924-17810 Flywheel Holder</p>

Suzuki Factory Tool Part Numbers

 <p>09926-18210 Oil Seal Guide</p>	 <p>09915-77310 Oil Pressure gage Set 1. Gage 09915-64510-001</p>	 <p>09915-77310 Oil Pressure Gage</p>	 <p>09915-67310 Vacume Gage</p>
 <p>09927-56020 Crankshaft Pulley Holder</p>	 <p>09917-68220 Camshaft Holder</p>	 <p>09915-64550 Compression gage 4Valve Attachment</p>	 <p>09915-64540 Compression gage 2Valve Attachment</p>
 <p>T-Box 10mm Wrench 09914-25550</p>	 <p>Compression Gage Hose 09915-64530</p>	 <p>Oil Pressure Gage Attachment 09915-78211</p>	


Frame Mount Diagram & Torque

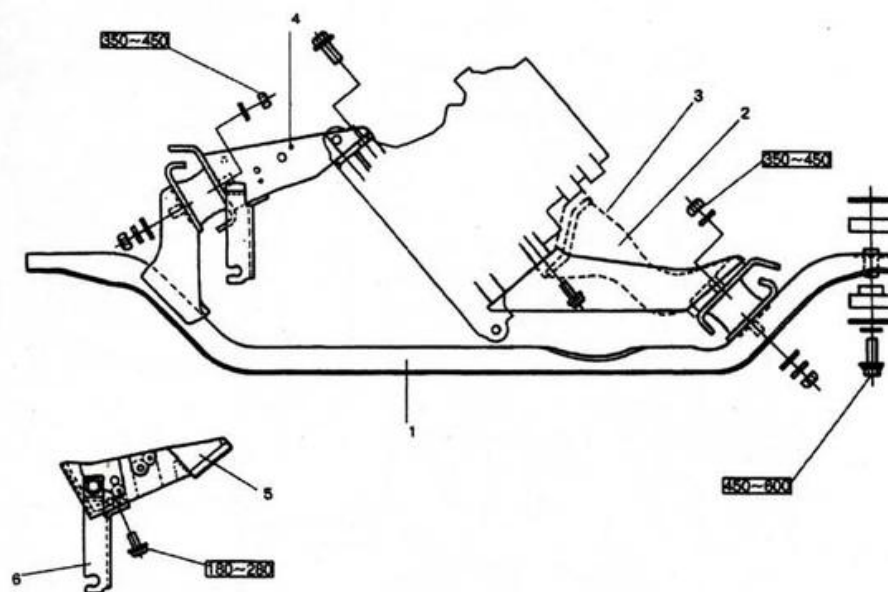





- 1. Front Mounting Member
- 2. Front Mounting Bracket Left (4WD)
- 3. Front Mounting Bracket Left (2WD)
- 4. Front Mounting Right Bracket (Truck)
- 5. Front Mounting Right Bracket (Van)
- 6. Clutch Cable Bracket (MT)

 Box=Torque Spec (kg.cm)

Engine & Transmission Mounts




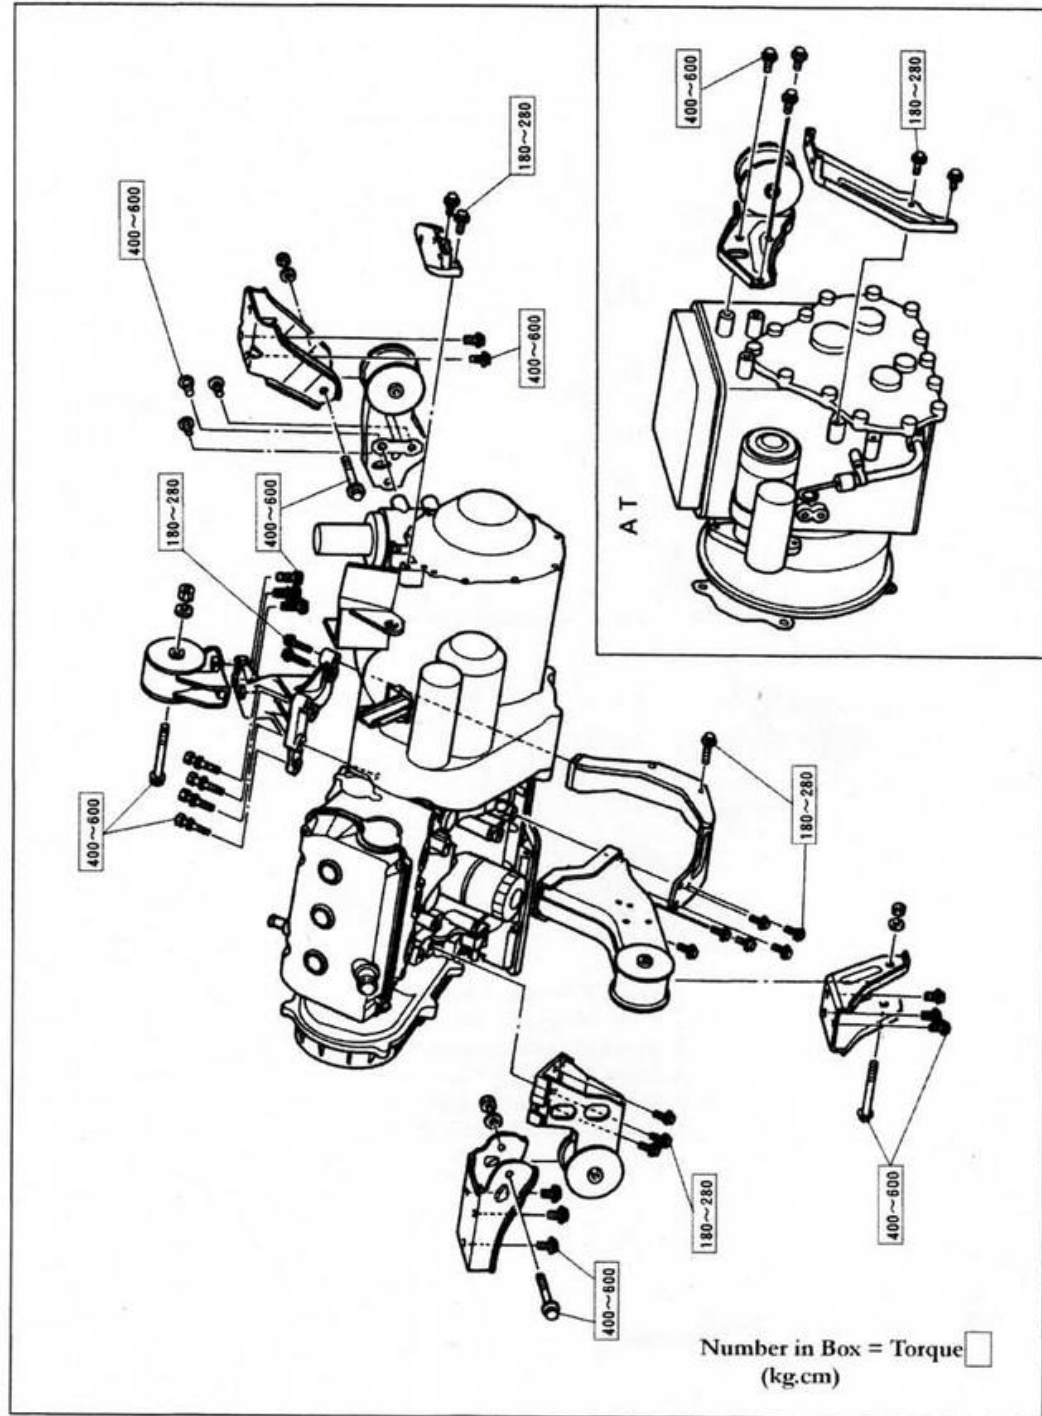


Engine Removal Truck 2WD & 4WD

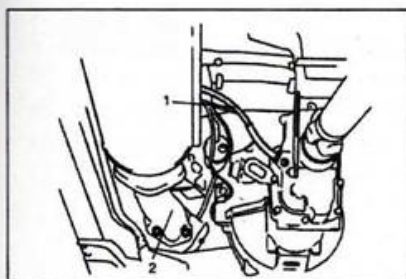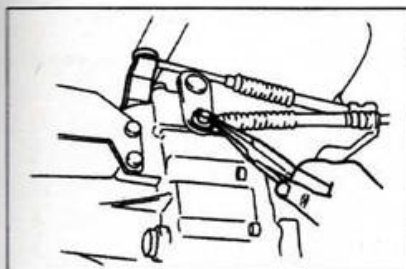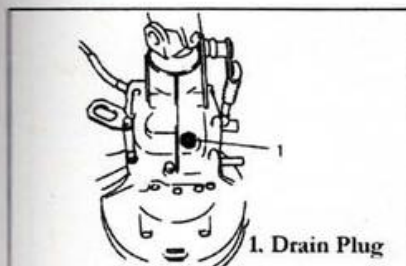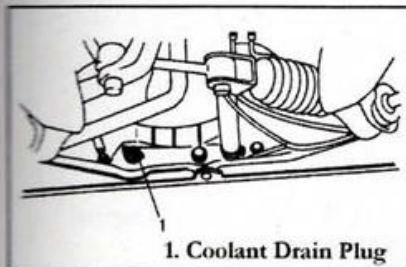


1. Remove Front Seat
2. Remove Front Door (Easy Access)
3. Remove Battery
4. Drain Coolant
5. Drain Transmission Oil
6. Disconnect Exhaust Pipe
7. Remove Rear Driveshaft
8. Remove Front Driveshaft (4WD)
9. Disconnect Clutch Cable (MT)
10. Disconnect shifter Connections
11. Disconnect Speedometer Cable
12. Disconnect Electrical Connections
13. Remove Heater Hoses
14. Remove Air Cleaner
15. Remove Air Duct
16. Disconnect Accelerator Cable
17. Disconnect Fuel Hose & Plug Line
18. Un-Bolt Mounts
20. Remove Engine

Engine Removal
VAN 2 & 4WD
AT-MT Versions

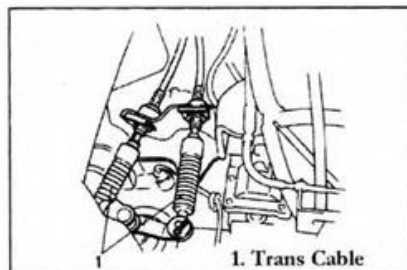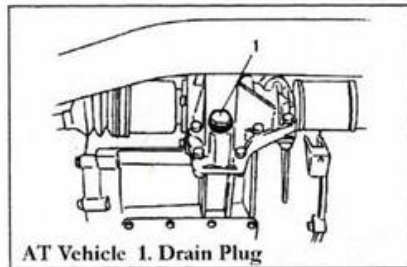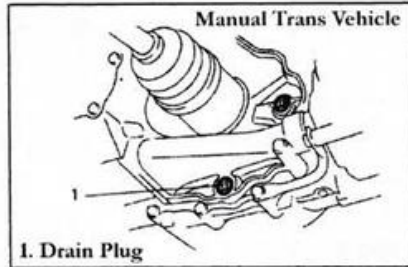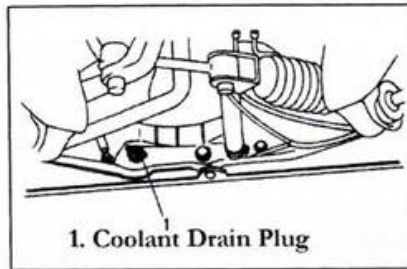

1. Remove Battery Connctions
2. Remove Engine Service Cover
3. Remove Rear Bumper
4. Drain Coolant System
5. Remove right-left wheel
6. Drain Transmission Oil
7. Disconnect Electrical Harness from Engine
8. Disconnect Speedometer Cable
9. Disonnect Accelerator Cable
10. Disconnect Transmission Cable
11. Disconnect Clutch Cable (MT Vehicle)
12. Remove Water Hose
13. Disconnect Vacume Hoses
14. Disconnect Fuel Hose
15. Remove (L-R) Brake Drum
16. Remove (L-R) Driveshaft hub
17. Disconnect Diveshaft connections
18. Disconnect Exhaust Center Pipe Bracket
19. Remove Front Drive Shaft (4WD Version)
20. Engine & Tranny Stiffener
21. Remove Muffler
22. Remove Exhuast Center Pipe
23. Turbo-Charger Air Cleaner (If Equiped)
24. Remove Oil Filler Pipe (If Equiped)
25. Disconnect Tranny Mount
26. Remove Rear Engine Mounting Bracket
27. Unbolt Engine Front Mount
28. Unbolt Right Engine Mount
29. Remove Engine

Truck Carry

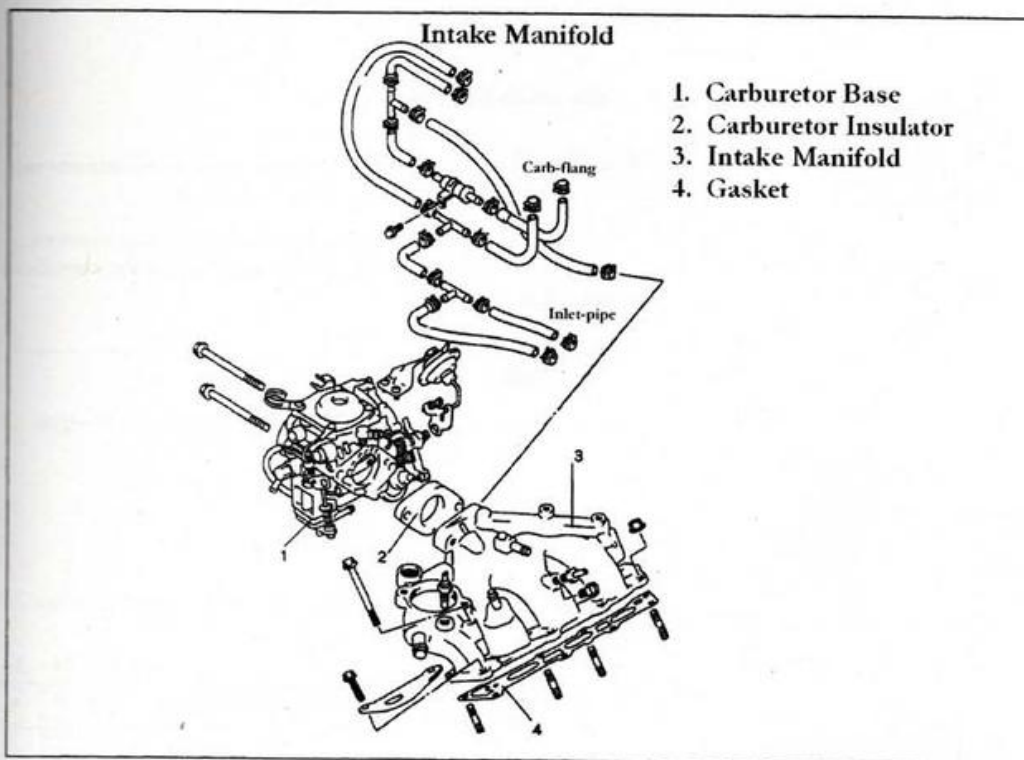


Remove or Disconnect the Following

1. Remove Front Seats
2. Remove Center Member and Side-Brake
3. Remove Air Cleaner
4. Drain Engine Coolant
5. Disconnect Carburetor Water Hose
6. Disconnect Carburetor Fuel Line
7. Disconnect Accelerator Cable
8. Disconnect Vacuum Hoses
9. Disconnect Electrical Connections
10. Disconnect and Remove Carburetor Assembly
11. Remove Manifold Attachment Bolts
12. Remove Intake Manifold

***Note:** Use Only New Replacement Gaskets

Torque: Intake Manifold Bolts to (kg.cm) 180~280


Valve Lash (2 Valve)

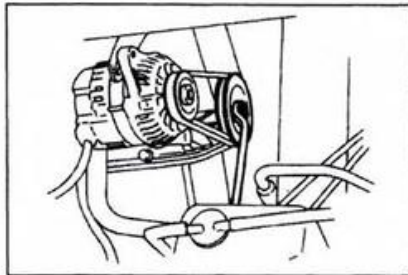


Valve Lash adjustment

2 Valve Engine

1. Remove Cylinder head valve cover
2. Rotate crankshaft to TDC position. Remove distributor cap and verify rotor bottom is facing #1 cylinder.
3. Using the chart below, use a feeler gage to slip between the adjustment screw and valve stem. Set to the specifications listed below.

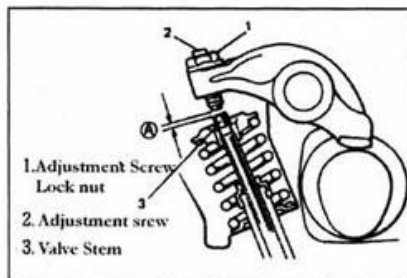

Note: Adjustment Screw Torque: (kg.cm) 150~200

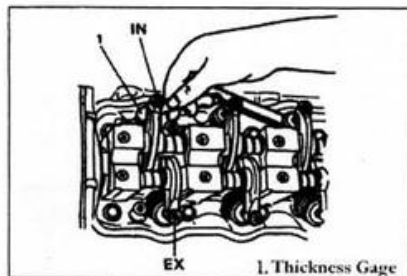

Cylinder Number		1	2	3
Cylinder 1 TDC	I N	○	○	
	E X	○		○
Cylinder 1 Rotate the crank 1 turn	I N			○
	E X		○	


○ Circle mark = Time to adjust

Valve clearance measurements

Cold (mm)	I N	0.15
	E X	0.17
Hot (mm)	I N	0.25
	E X	0.27

4. Install a new valve cover gasket and install valve cover.
do not over tighten valve cover bolts
5. Set timing to specifications (see timing settings at the beginning of this book).
6. Test drive vehicle

Carburetor Intake Manifold VAN

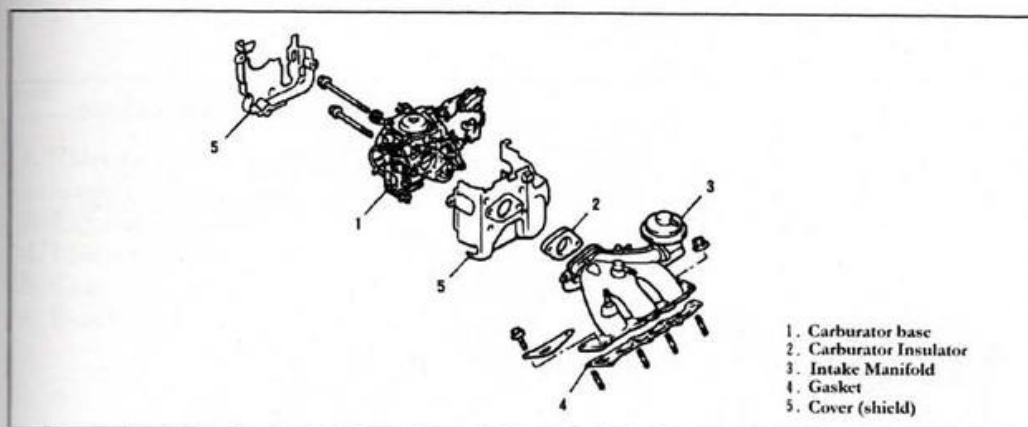

Caution: Never Drain Fluids While Hot. Always Drain Coolant at Outside Temperature


1. Drain Radiator
2. Remove Engine Service Cover
3. Remove Air Cleaner Assembly
4. Disconnect Electrical Connections
5. Remove Vacuum Hoses
6. Disconnect Accelerator Cable
7. Disconnect Fuel Lines and Plug
8. Remove Carburetor Cover
9. Disconnect Water Hose
10. Remove Carburetor Attachment Bolts and Remove Carburetor
11. Remove Intake Manifold Attachment Bolts and Remove Mainifold

Intake Manifold Torque: (kg.cm) 180~280

Note: Never Reuse Coolant

Exhaust Manifold

Truck

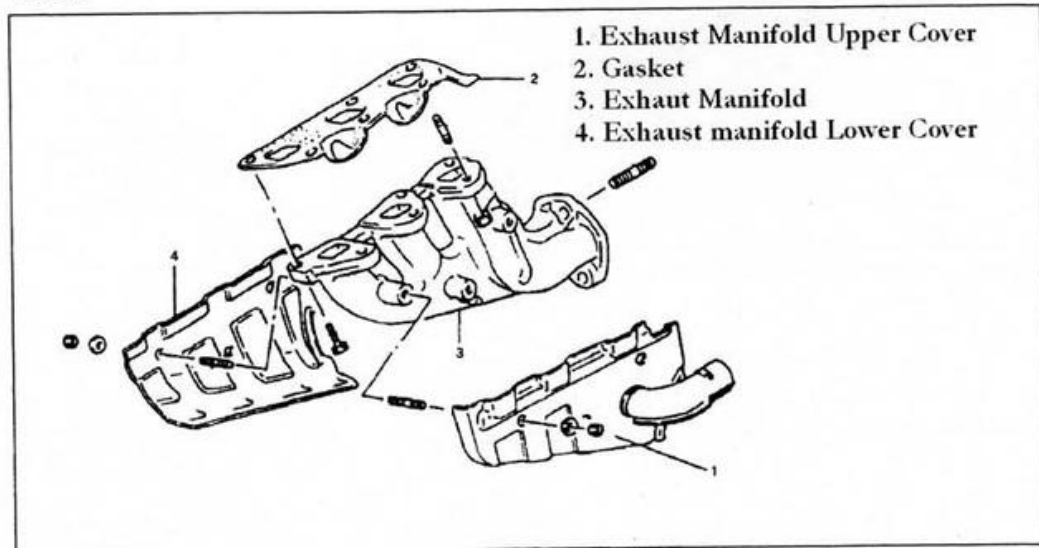


1. Remove Seat
2. Remove Air Cleaner Assembly
3. Remove Muffler
4. Remove Exhaust manifold Upper Cover
5. Remove Exhaust Manifold Lower Cover
6. Remove Exhaust Manifold Attachment Bolts
7. Remove Exhaust Manifold

Torque: Manifold Bolts (kg.cm) 180~200

Exhaust Manifold

Van

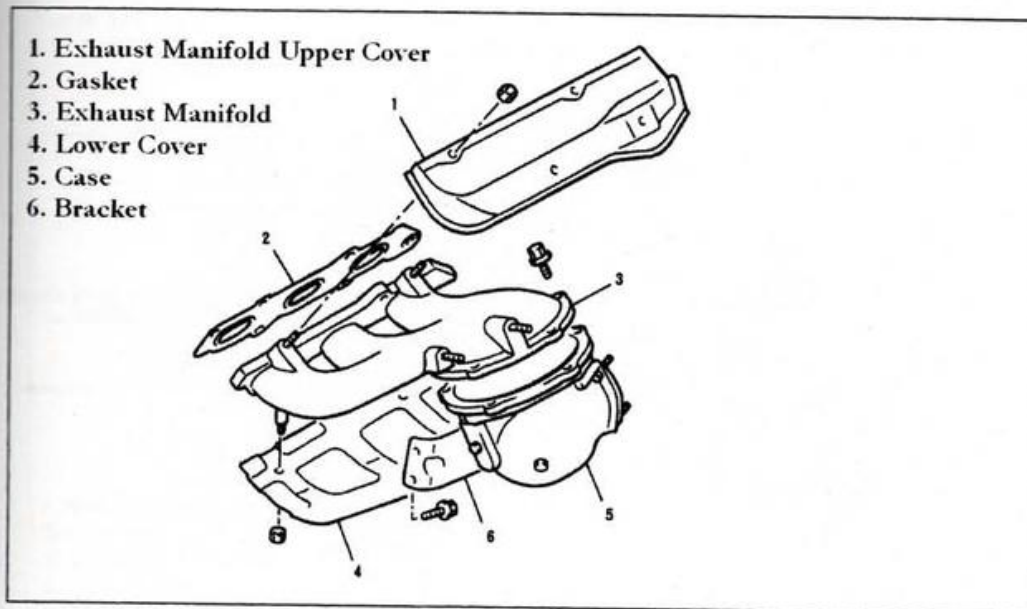


1. Jack Up Front of Vehicle
2. Remove Engine Service Cover
3. Remove Exhaust Manifold Upper Cover
4. Remove Exhaust Manifold Lower Cover
5. Remove Center Exhaust Pipe
6. Disconnect Sensor Coupler
7. Disconnect Bracket Attachment
8. Remove Manifold Attachment Bolts
9. Remove Manifold

Torque: Manifold Bolts (kg.cm) 100~200
Bracket Bolts (kg.cm) 180~280

Timing Belt & Tensioner Part Numbers


Timing Belt (4V)
FIG.14

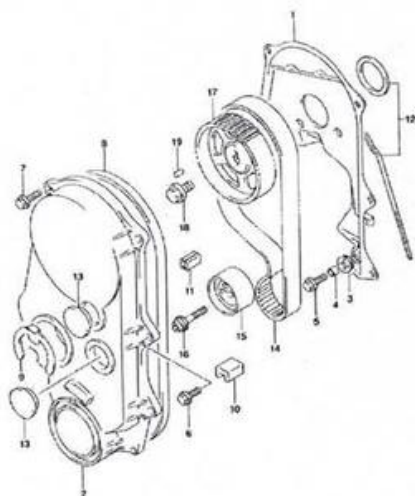

- | | |
|-----------------|---------------------------------|
| 1. 11360-79A00 | Cover: Timing Belt Inside |
| 2. 11390-77G01 | Cover: Outside |
| 3. 09308-10004 | Grommet |
| 4. 09180-06106 | Spacer 6.8x10x7 |
| 5. 09116-06167 | Bolt 6x20 |
| 6. 01550-06163 | Bolt |
| 7. 01550-06203 | Bolt |
| 8. 11396-77G00 | Seal: Timing Belt Cover-Outside |
| 9. 11397-76G00 | E-Ring: Timing Belt Cover |
| 10. 11394-77G00 | Seal |
| 11. 11394-70B00 | Seal |
| 12. 11480-77G00 | Seal Set: Timing Cover-Inside |
| 13. 09250-30017 | Cap: OD:36 |
| 14. 12761-79A00 | Belt: Timing |
| 15. 12810-76G00 | Tensioner |
| 16. 12815-76G00 | Bolt: Tensioner |
| 17. 12741-61D01 | Pulley: Camshaft Timing |
| 18. 01550-12253 | Bolt |
| 19. 09206-05001 | Pin |

Timing Belt (4V)

Timing Belt (Turbo)
FIG.15

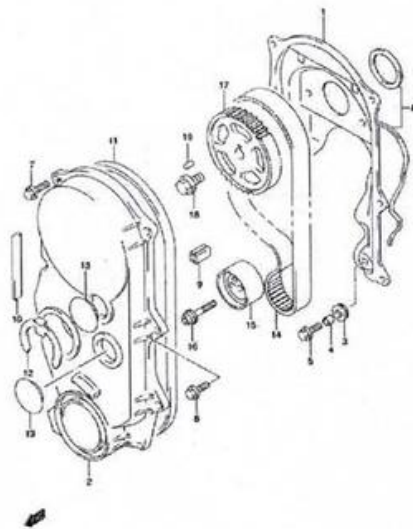


- | | |
|-----------------|------------------------------|
| 1. 11360-78A00 | Cover: Timing Belt-Inside |
| 2. 11390-76G01 | Cover: Outside |
| 3. 09308-10004 | Grommet |
| 4. 09180-06106 | Spacer: 6.8x8x10x7 |
| 5. 09116-06167 | Bolt 6x20 |
| 6. 01550-06163 | Bolt |
| 7. 01550-06203 | Bolt |
| 8. 11480-76G00 | Seal Set:Timing Cover-Inside |
| 9. 11394-70B00 | Seal |
| 10. 11395-76G00 | Seal |
| 11. 11396-76G00 | Seal |
| 12. 11397-76G00 | E Ring: Timing Cover |
| 13. 09250-30017 | Cap: OD:36 |
| 14. 12761-78A00 | Belt: Timing |
| 15. 12810-76G00 | Tensioner |
| 16. 12815-76G00 | Tensioner Bolt |
| 17. 12741-70D00 | Pulley: Camshaft Timing |
| 18. 01550-12253 | Bolt |
| 19. 09206-05001 | Pin |

Timing Belt (Turbo)

Timing Belt Tensioner

Van & Truck

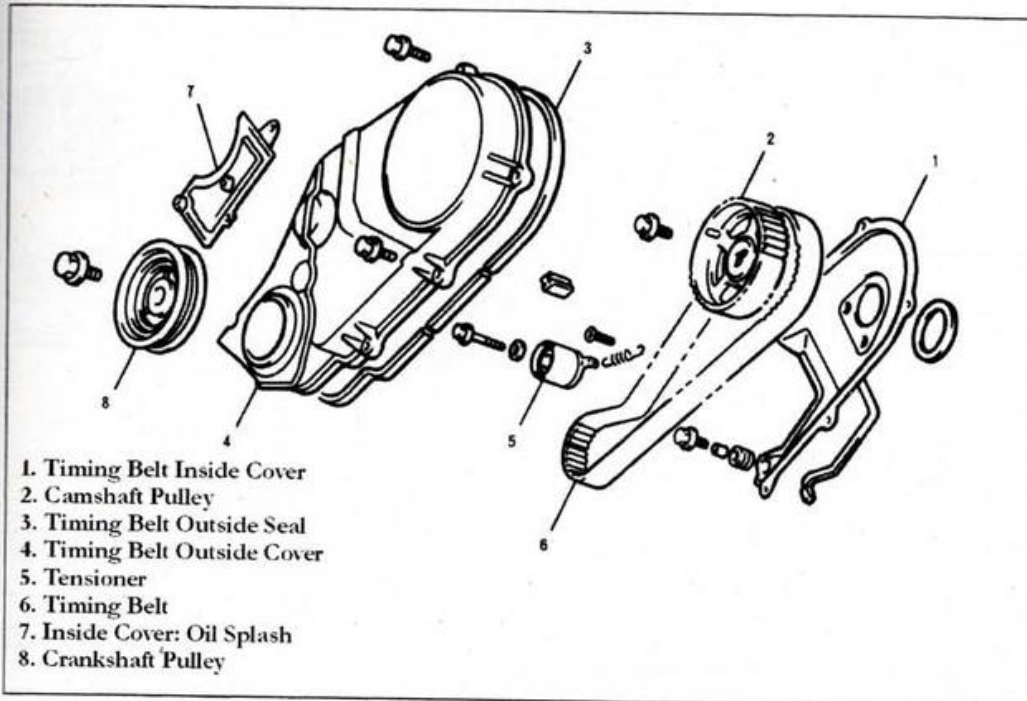

Note: Timing Belt Must be Changed Every 100,000 Kilometers (64,000 Miles)


Tensioner Replacement

1. Raise the Front of Vehicle. Place Jack Stands as recommended in this book
2. Remove Engine Service Cover
3. Remove Alternator Belt Outside Cover
4. Turn Crankshaft Pulley Over to TDC Position (Top Dead Center)
Note: Verify Distributor Rotor is Pointed to #1 Cylinder & Transmission Service Mark is Lined Up Through the View Hole.
5. Remove Alternator Belt
6. Remove Crankshaft Pulley
7. Remove Alternator Belt Inside Cover
8. Remove Timing Belt Outside Cover
9. Remove Tensioner and Inspect. If Over 50,000 Kilometers Replace. It is Not Recommended to Reuse Tensioner. If Tensioner Shows Damage Replace Timing Belt.

Note: It is Always Best Policy to Replace Tensioner & Timing Belt as a Set

Note: After Tensioner or Belt Replacement Always Adjust Valve Lash


Timing Belt Replacement

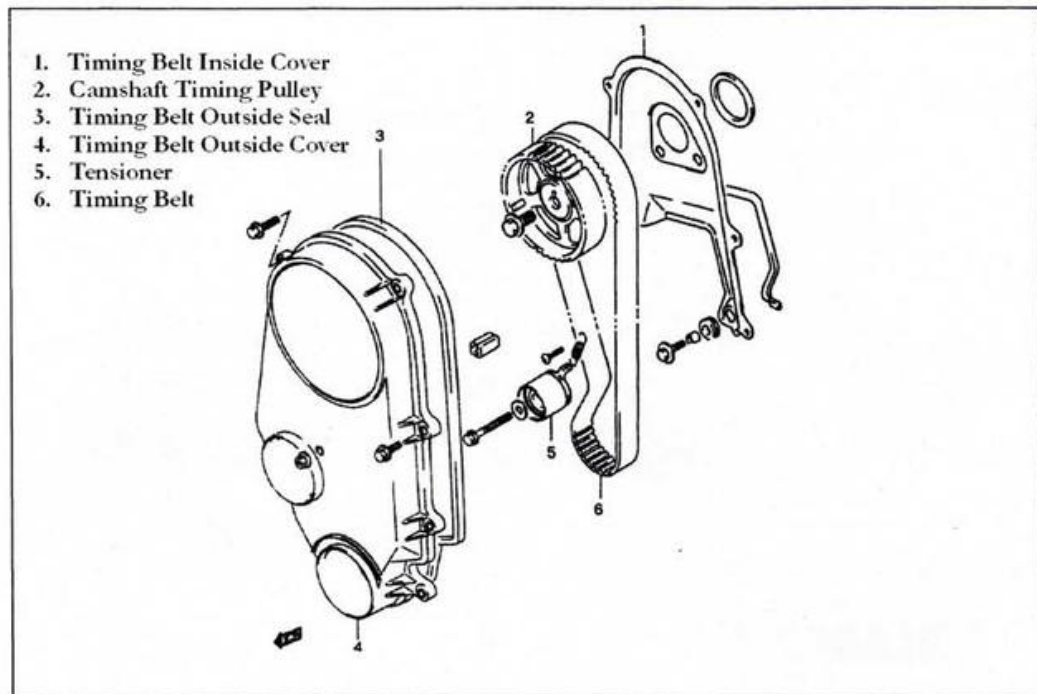

***Belt change every 100,000 Kilometers**


***If tensioner fails, always replace belt**

Timing Belt Replacement

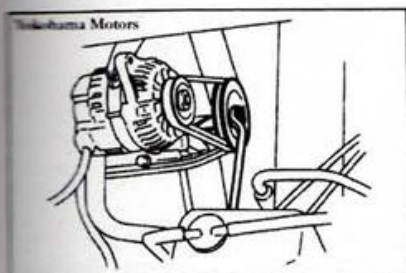


Procedure

1. Turn crank pulley until pointed to TDC
2. Remove crank pulley
3. Remove outside cover
4. Loosen tensioner
5. Remove old belt
6. Clean area
7. Inspect parts for damage or cracks (replace if damaged)

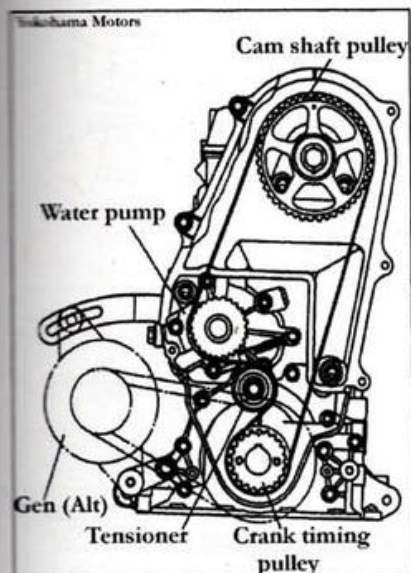

Service Point


- * Check tensioner for free spin. Any resistance replace*

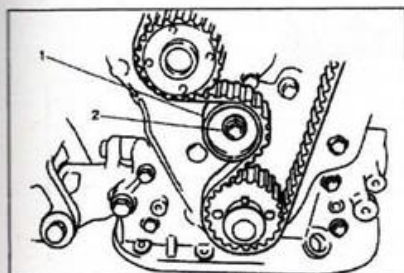

1. Tensioner
2. Tensioner bolt

8. Install Reverse Procedure
9. Run Engine 5~10 at Variable Speeds
10. Check Timing Settings
11. Check Valve Lash


Valve Lash (2 Valve)

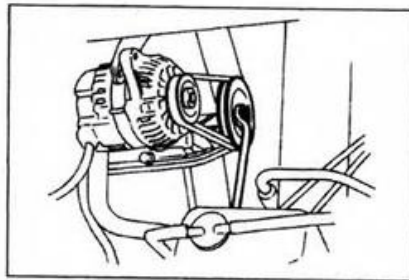


Valve Lash adjustment

2 Valve Engine

1. Remove Cylinder head valve cover
2. Rotate crankshaft to TDC position. Remove distributor cap and verify rotor bottom is facing #1 cylinder.
3. Using the chart below, use a feeler gage to slip between the adjustment screw and valve stem. Set to the specifications listed below.

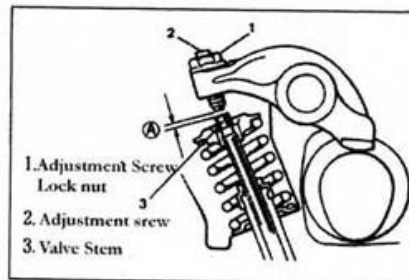

Note: Adjustment Screw Torque: (kg.cm) 150~200

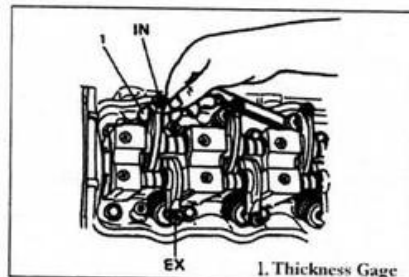

Cylinder Number		1	2	3
Cylinder 1 TDC	I N	○	○	
	E X	○		○
Cylinder 1 Rotate the crank 1 turn	I N			○
	E X		○	


○ Circle mark = Time to adjust

Valve clearance measurements

Cold (mm)	I N	0.15
	E X	0.17
Hot (mm)	I N	0.25
	E X	0.27

4. Install a new valve cover gasket and install valve cover.
do not over tighten valve cover bolts
5. Set timing to specifications (see timing settings at the beginning of this book).
6. Test drive vehicle



Valve Lash (4 Valve)

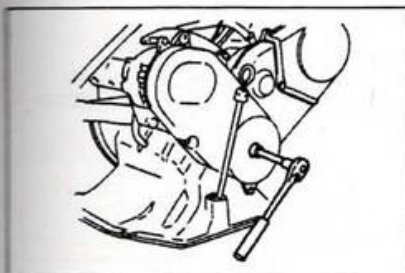

Valve lash adjustment

4 Valve

1. Remove Cylinder head valve cover
2. Rotate cranshaft to TDC position. Remove distributor car and verify rotor buton is facing #1 cylinder
3. Using the chart below, use a feeler gage to slip between the adjustment screw and valve stem. Set to the specifications listed below.

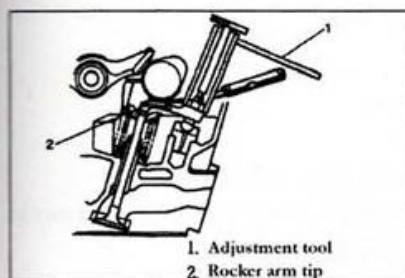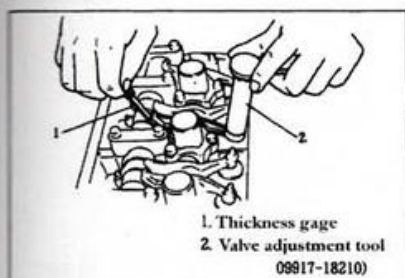

Cylinder Number		1	2	3
Cylinder #1 TDC	I N	○	○	
	E X	○		○
Cylinder #1 Rotate the crank 1 turn	I N			○
	E X		○	


○ Circle mark=Time to adjust

Cold (mm)	I N	0,08
	E X	0,10
Hot (mm)	I N	0,12
	E X	0,12


Adjustment screw lock nut torque (kg.cm) 100 to 130

Engine Oil

Engine Oil Level

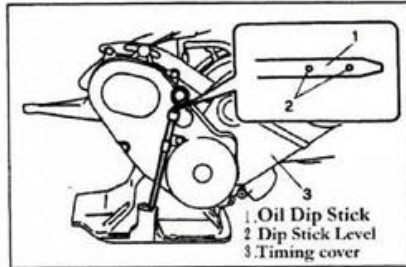


1. Remove dip stick and check level.
Level should be between the dots
2. If clean, add oil to proper level.

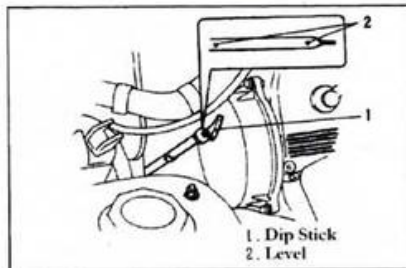


Oil Change


1. Remove drain plug from oil pan.
2. Inspect oil for contaminants, if clean replace plug.

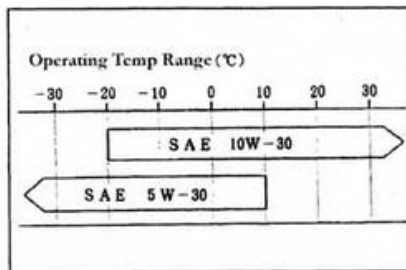



3. Fill oil to proper capacity with recommended oil from the temperature chart. Verify level with dip stick.

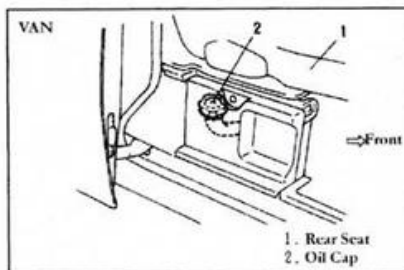

Oil Capacity 2.3 Liter
Check vehicle specifications chart

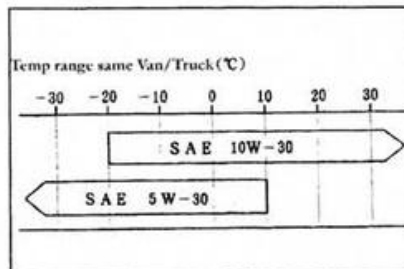

Engine Oil Pressure Test

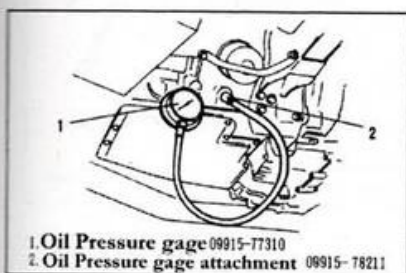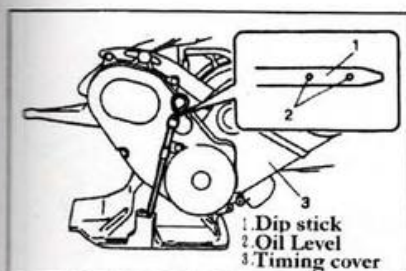

Part # for gage & Adapter is Suzuki Equipement

Oil Pressure

VAN

Caution: Make sure to check oil level is correct!

- Check oil level
add if necessary
- Make sure oil is clean
Change before test if dirty.
If contaminants such as metal shavings are found, damage will occur to test equipment.
At this point recommended to disassemble engine for inspection.

1. Remove plug from cylinder block as shown.

2. Attach gage and adapter as shown

3. Start engine and run to operating temperature.

4. Operating temp $90^{\circ}\text{C} \sim 100^{\circ}\text{C}$

Run engine to 4000RPM. Pressure range below.

Oil Pressure
(kg/cm) : Turbo 3.3 ~ 4.3
Non-Turbo 2.7 ~ 3.7

5. Remove gage and adapter. Use new silicon tape on plug and torque to specification below.

6. Start engine and inspect for leaks.


Plug torque (kg · cm) : 120 ~ 150

Pressure out of range: Replace pump and repeat procedure.

Oil Pump Parts

Oil Pump (All)

FIG.31

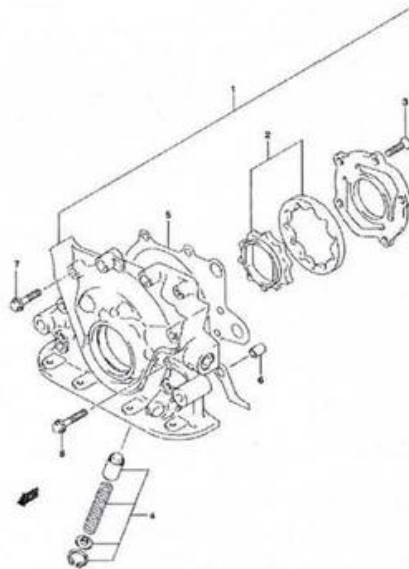


- | | | |
|----|-------------|-----------------------|
| 1. | 16100-76820 | Oil Pump Set |
| 2. | 16130-70B01 | Rotor Set |
| 3. | 02122-06163 | Screw |
| 4. | 16150-60A00 | Relief Valve Set |
| 5. | 16119-76G00 | Gasket: Oil Pump Case |
| 6. | 04211-09109 | Pin |
| 7. | 01550-06303 | Bolt |
| 8. | 01550-06353 | Bolt |

Oil Pump (All)

Oil Pump


Procedure

1. Remove the following
Crank pulley, outside cover, timing belt tensioner,
timing belt. *more information see "Timing belt removal".


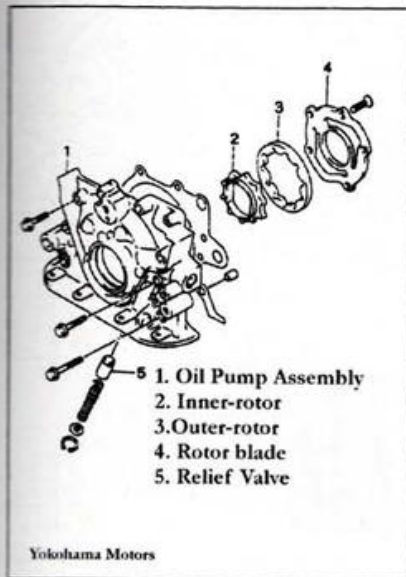


Remove

2. Timing belt pulley
3. Engine front mounts
4. Oil pan
5. Oil strainer

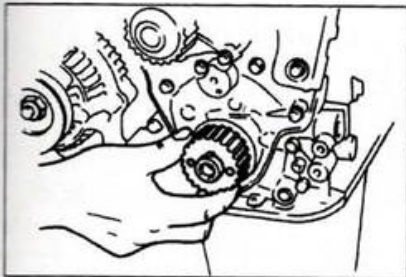

6. Remove the oil pump bolts (10).
7. Carefully remove assembly

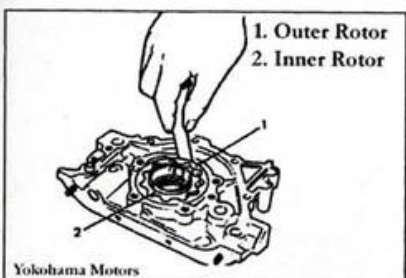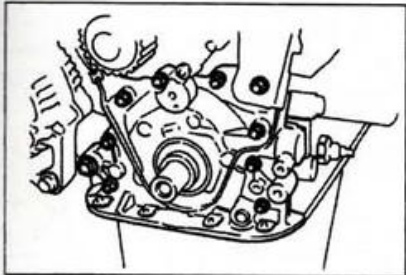


Pump Clearance Check

Outer rotor to case clearance must be below
0.13 (mm).

Replace if clearance is out of range


Oil Pump

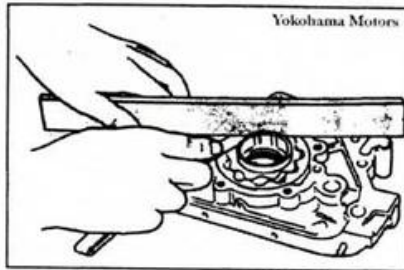


Side Clearence

Measure side clearence.
Side clearence must be below 0.15(mm)

Out of range replace

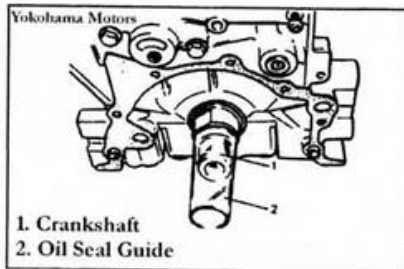


- 1. Crankshaft
- 2. Oil Seal Guide

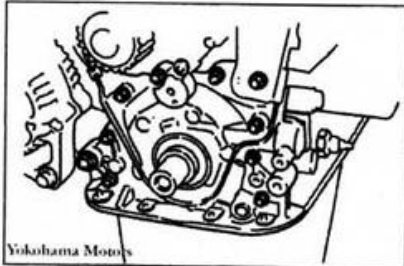

Attach oil pump ***Do not over torque***

Torque bolts to (kg.cm) 90-120

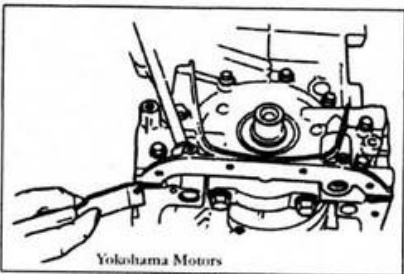

Oil Pump Gasket


***Make sure all of the old gasket has been removed
ans surface is clean before installing new gasket***

Re-assemble timing cover assembly

Always fill engine with new oil

Run engine a check oil pressure (begining of chapter)

Oil Pan & Strainer

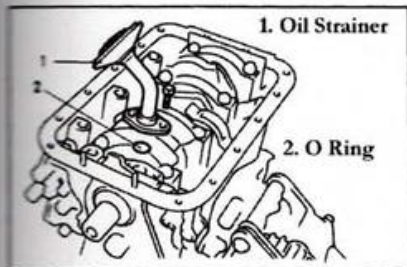

When ever removing or replacing the oil strainer always replace the O Ring. Before installing the O Ring, coat with clean engine oil.

Oil Strainer torque (kg.cm) 90-120



Type 1

Oil Pan Gasket. Apply High Temp Gasket Sealer

Note: Make sure all surfaces are oil free before applying sealant

Suzuki Sealant Part#1207C 99000-31150

Oil Pan Torque (kg.cm) 90-120

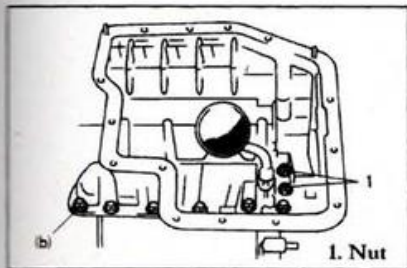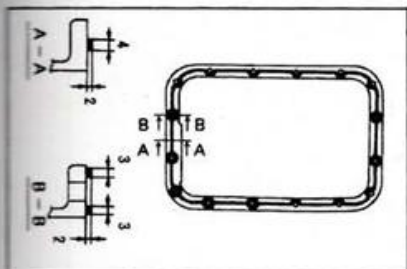



Type 2

Oil Pan Gasket. Apply High Temp Gasket Sealer

Note: Make sure all surfaces are oil free before applying sealant


Suzuki Sealant Part#1207C 99000-31150

Oil Pan Torque (kg.cm) 90-120

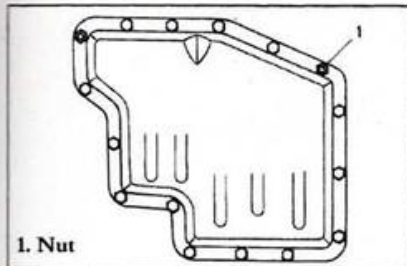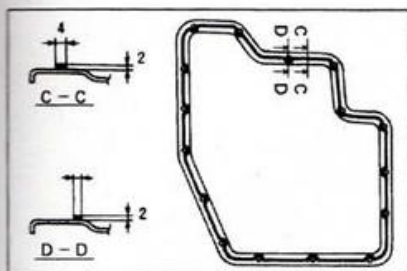


Cylinder Head, Camshaft, Valve, Rocker Arm

2 Valve Head

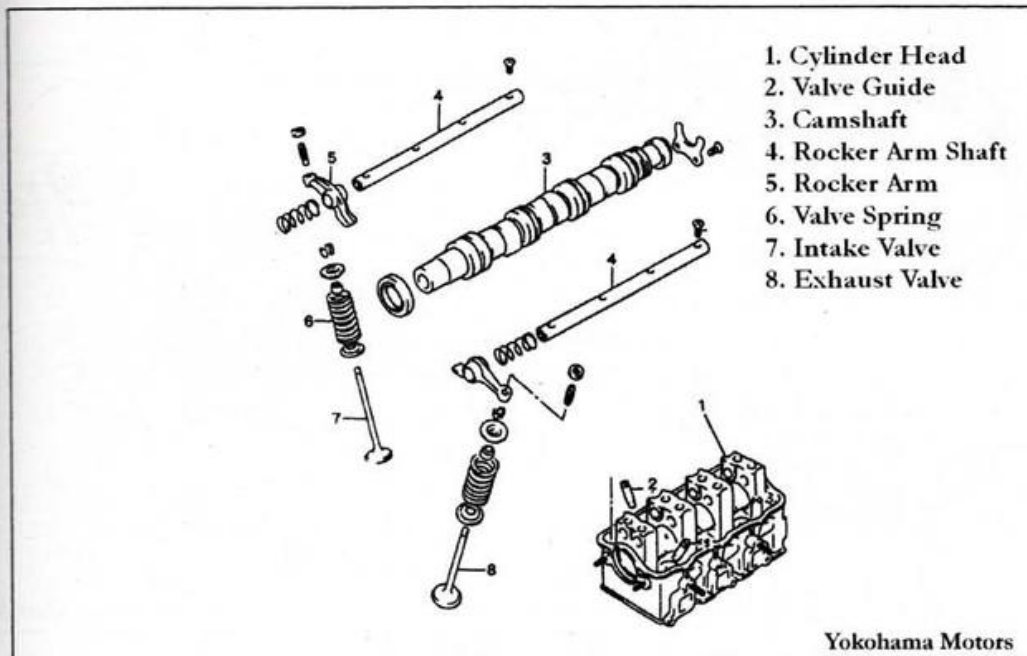


Disassemble-Disconnect-Remove The Following


1. Remove front seat
2. Disconnect negative (-) battery cable
3. Remove Engine service cover
4. Drain coolant system
5. Remove air cleaner case
6. Remove water pump
7. Disconnect fuel hose
8. Disconnect vacume hoses
9. Disconnect accelerator cable
10. Disconnect wiring
11. Remove timming belt (see previous)
12. Remove cam shaft pulley
13. Disconnect exhaust pipe and Manifold
14. *If equipped Turbo attachments*
15. Remove distributor
16. Remove valve cover
17. Remove cylinder head bolts (8)
18. Remove cylinder head

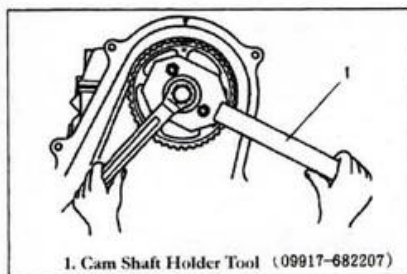


Cylinder Head (2-Valve)

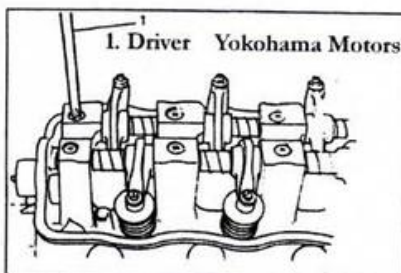


1. Remove Rocker Arm Shafts Screws

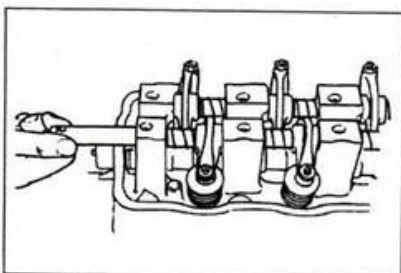

2. Remove intake and exhaust rocker arm shaft, then remove rocker arm shaft springs

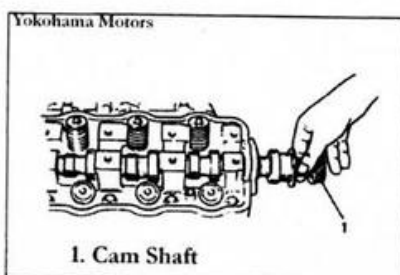

3. Carefully slide out cam shaft

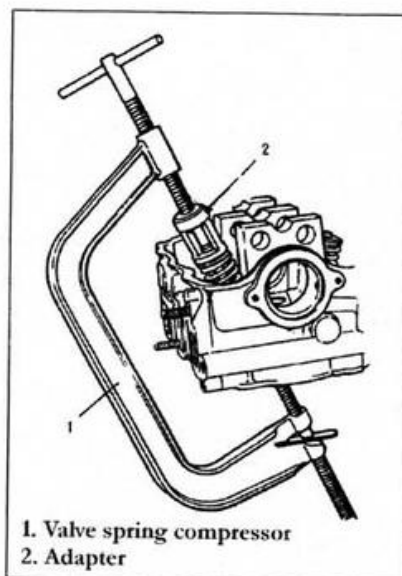


4. Using a valve spring compressor remove springs


note-lable springs from original location

*Caution-never hit sticky springs with a steel hammer
use only soft brass head hammer*

Cylinder Head (2-Valve)

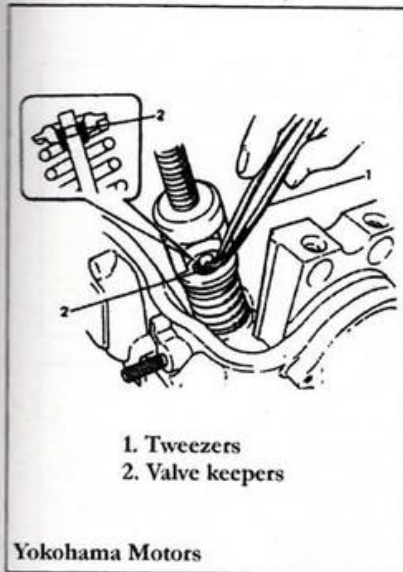


Caution- Springs under extream pressure, use saftey glasses when removing springs

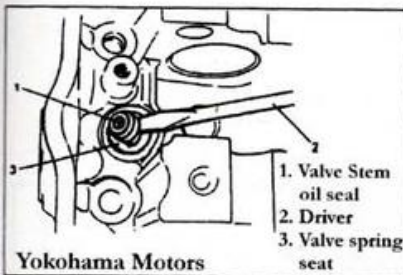

7. Remove valve lifter, spring retainer, valve spring
8. Remove valve
9. Remove valve stem oil seal, next remove valve spring seat


Caution- Never re-use oil seals!

Note-if valve guides must be removed use Suzuki tool number (09916-44910)

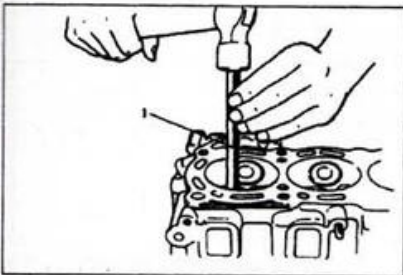


Inspection

Using a micrometer check the cam hight. If it is out of spec replace camshaft

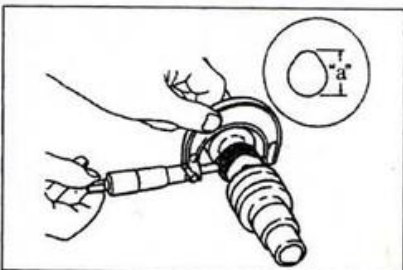

Cam Hight "a"	Acceptable	Limit
Intake cam (mm)	30.74	30.6
Exhaust cam (mm)	29.75	29.6

Cylinder Head (2-Valve)

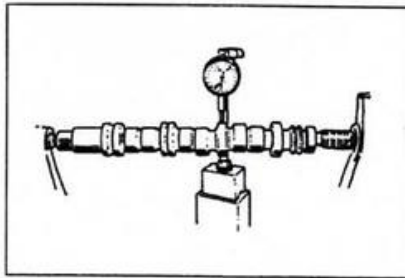

Camshaft Straightness Measurement

Use a dial indicator to measure for straightness
rotate the camshaft and observe the reading

Reading must not exceed 0.10(mm)

If over the limits replace camshaft



Camshaft Journal

*To determine the amount of out-of-round,
measure each journal in two different
directions and compare to specifications

*Also check for journal taper by measuring at
each end of the journal


Journal limits: Within limits 0.050-0.091

Replace 0.15

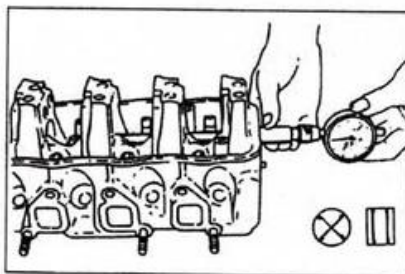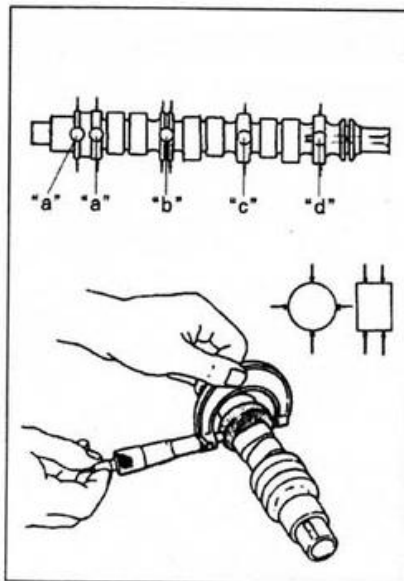

		Camshaft Outside (mm) Diameter	Cylinder Head Diameter (mm)
"a"	Normal	43.425~43.450	43.500~43.516
	Limit	43.375	43.525
"b"	Normal	43.625~43.650	43.700~43.716
	Limit	43.575	43.725
"c"	Normal	43.825~43.850	43.900~43.916
	Limit	43.755	43.915
"d"	Normal	44.205~44.050	44.100~44.116
	Limit	43.975	44.125


Cylinder Head (2-Valve)

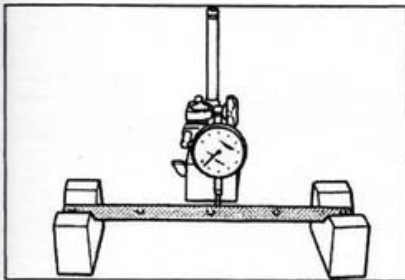

Rocker Arm Shaft Inspection

Use a dial gage to check diameter for warp age

*Maximum allowance 0.12 (mm)

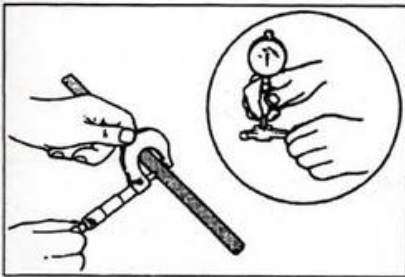


Roker Arm and Roker Arm Shaft Clearance

Rocker Arm and Shaft clearence

Allowance 0.005-0.040


Replace 0.06

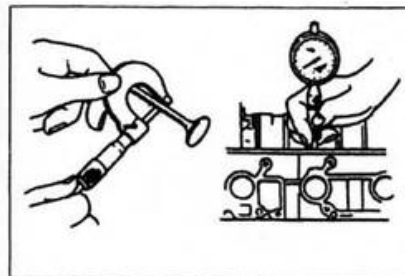

Valve Stem & Guide Measurments

		Allowance	Limit
Valve Stem outer Diameter (mm)	I N	5.465~5.480	—
	E X	5.450~5.465	—
Valve Guide Inside Diameter (mm)	I N	5.500~5.512	5.54
	E X	5.500~5.512	5.54
Stem & Guide Clearence (mm)	I N	0.020~0.050	0.07
	E X	0.035~0.065	0.09


Cylinder Head (2-Valve)

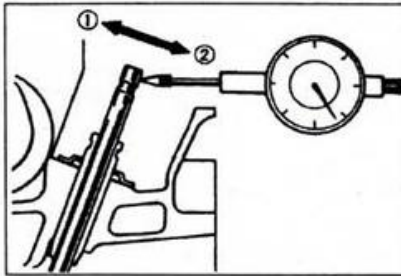

If a bore gage is not available, it is possible to use a dial gage. Use the diagram to the right as an example.


If the play between the stem and the guide are outside the range below. Replace valve guide.

IN 0.14
EX 0.18

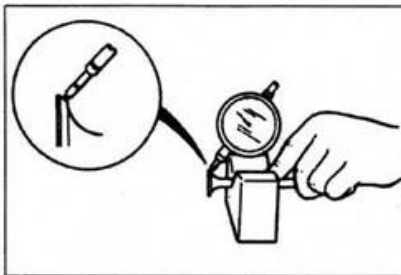


Place a Valve in a V block, and using a dial gage rotate valve.

Maximum allowance: 0.08 (mm)

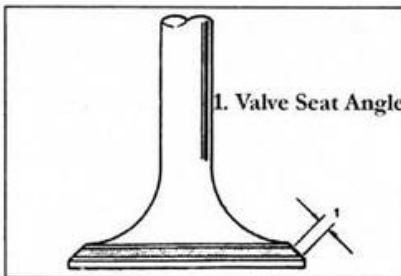


Valve to Valve Seat face

IN 1.3-1.5(mm)
EX 1.3-1.5(mm)

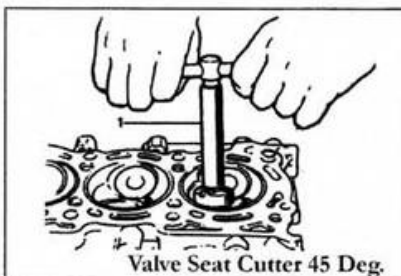


*Use extreme caution when cutting valve seats. It is recommended to start with a small cutter and work up to a larger cutter. Finally with 45 degree cutter. It is recommended to take the head to a machine shop for this operation. Over-cutting can cause serious damage to the head.

Cylinder Head (2-Valve)

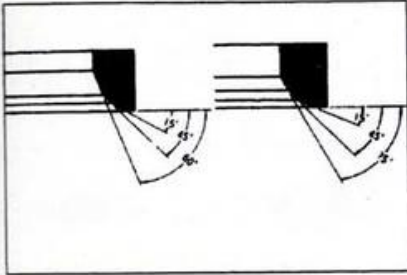

Valve Lap Degree Diagram

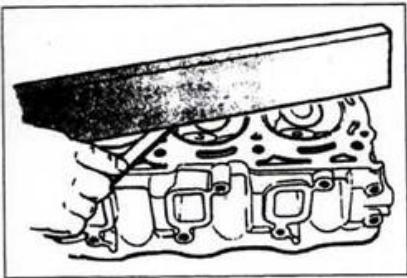


Cylinder Head Plane

Use a straight edge bar and a feeler gage

Allowance 0.05(mm)

Over range, have head machined to spec

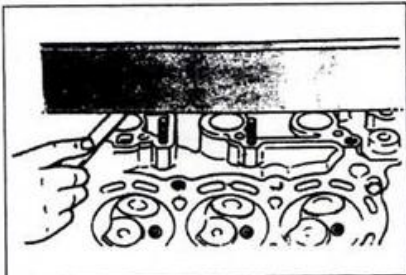



Manifold Face (Cylinder Head)

Use a straight edge bar and a feeler gage.

Allowance 0.10(mm)

Out of range, have face milled at a machine shop

Cylinder Head (2-Valve)

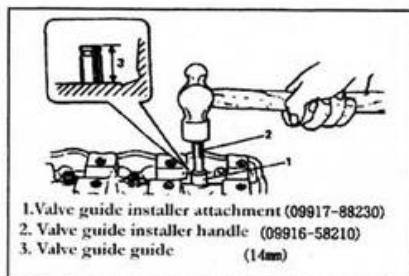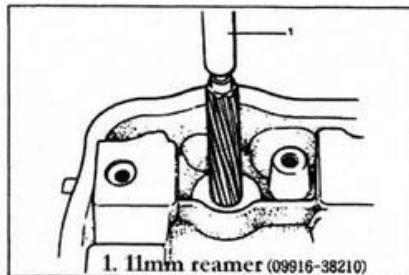


Assembly

1. Before installation of new valve guides use a 11mm reamer.

2. Pre-heat cylinder head to 80-100 Degrees Celcius
Use the proper tools as displayed in the box to the left. Install guides.

Note-if a guide has been removed for any reason it must be replaced with a new guide.

Oversize Guides (mm) 0.03

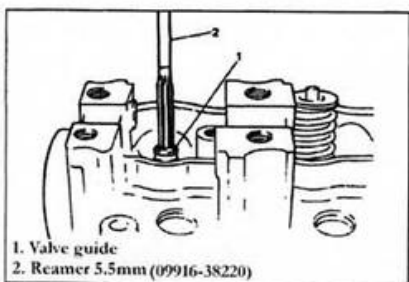


3. After installation, use a 5.5(mm) reamer to verify size.
4. Next place valve spring in place
5. Install new valve stem oil seal


*Note-lubricate new seals with clean engine oil

Cylinder Head (2-Valve)


Assembly

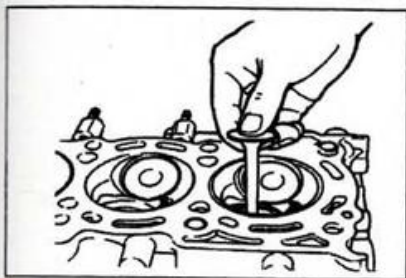


6. Lubricate valve with engine oil and slide into guide. Make sure guide slides without restriction.

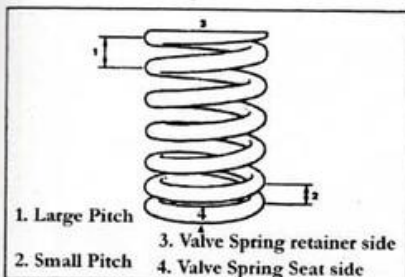


7. See chart on left for proper spring seating

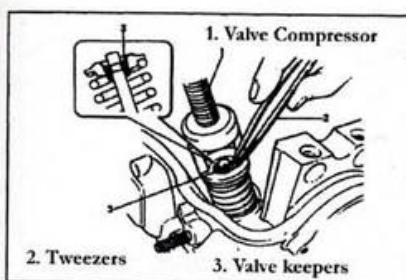

8. Using a valve compressor, install valve keepers


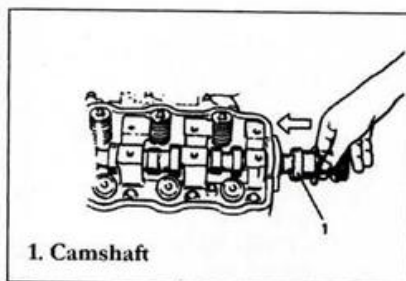


9. Heavily lubricate camshaft with engine oil and install

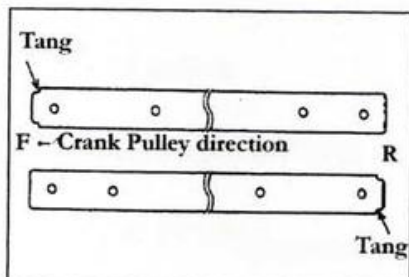

10. Install rocker arm shaft. Make sure tang is in the correct direction as noted in the diagram on the left.

Cylinder Head (2-Valve)

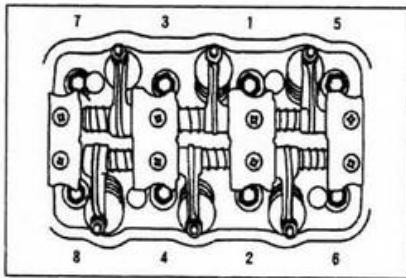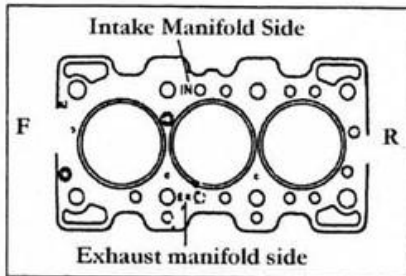

Assembly

Install new head gasket. Follow the diagram on the left for guidance.

Do not use sealant

Make sure all surfaces are clean

Install head assembly


Torque to (kg.cm) 550-600

Follow torque sequence on the chart to the left


Assemble remaining parts as in previous section of this chapter.

Cylinder Head (4-Valve)

Yokohama Motors

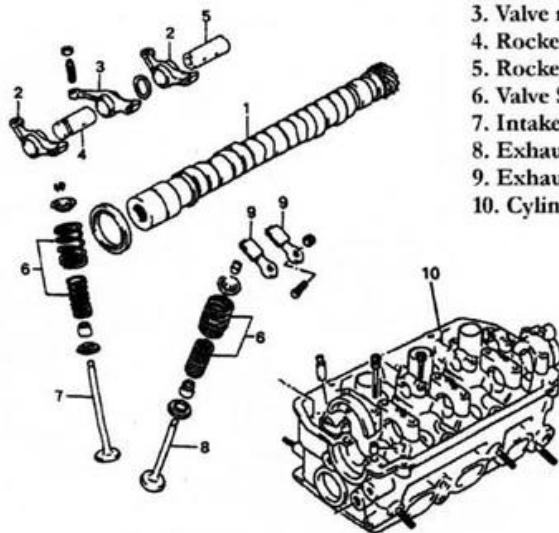

1. Camshaft
2. Valve rocker intake No. 1 Arm
3. Valve rocker intake No.2 Arm
4. Rocker Arm No.1 Shaft
5. Rocker Arm No.2 Shaft
6. Valve Spring Set
7. Intake Valve
8. Exhaust Valve
9. Exhaust Valve Roker Arm
10. Cylinder Head

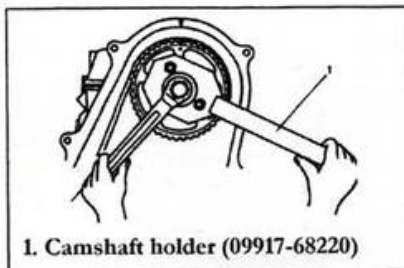

1. Camshaft holder (09917-68220)


Revomal

1. Drain coolant system
2. Remove service cover
3. Reome air cleaner case
4. Remove water hose
5. Disconnect vacuum hoses
6. Disconnect fuel hose
7. Disconnect accelerator cable
8. Remove timing belt (see previous steps)
9. Disconnect Electrical connectors
10. Remove camshaft timing pulley
11. Remove timing belt inside cover
12. Remove exhaust center pipe
13. Remove exhaust manifold
14. Remove cylinder head


Cylinder Head (4-Valve)

Disassembly


Remove Rocker Arm Shaft

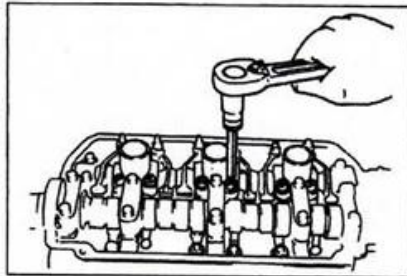


Remove
Intake Rocker Arm
Camshaft Caps
Camshaft

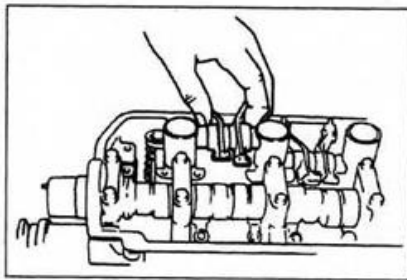

Remove Cylinder head Bolts (8)
Remove Cylinder Head

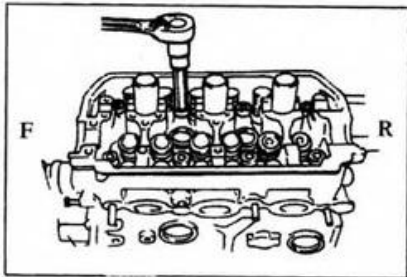


1. Valve Compressor
2. Adapter

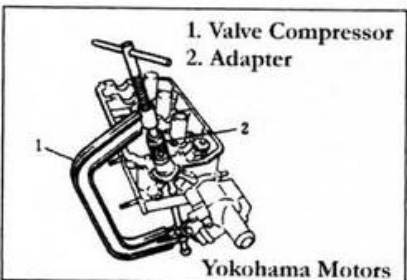


Using a spring compressor remove valves
*Spring under extreme pressure, always
use proper safety glasses*

Cylinder Head (4-Valve)


Inspection

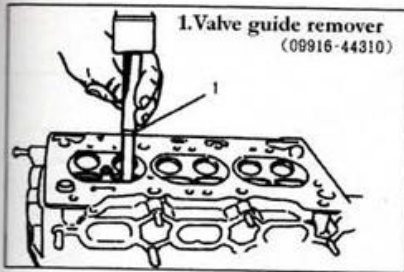

Using an appropriate tool, remove valve guides
Note-Never re-use valve guides

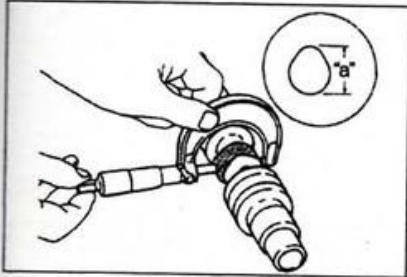


Cam Hight " a "	Allowance	Limit
Intake Cam (mm)	30.74	30.6
Exhaust Cam (mm)	30.20	30.1

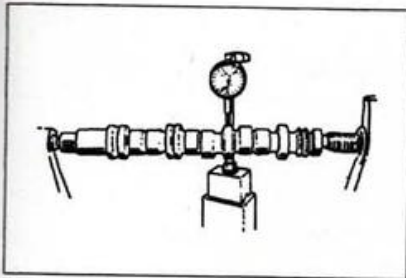

Camshaft Warp Age

Using a dial gage, check the camshaft


Allowance: Below 0.10 (mm)

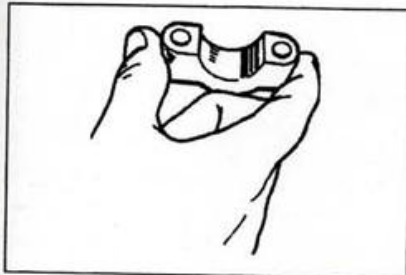

Check the camshaft housing caps for scratches, etc.
If visable damage exists-replace

Cylinder Head (4-Valve)


Inspection

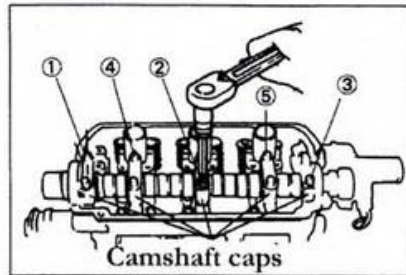

Re-insert camshaft into head and torque caps

Torque (kg.cm) 90-100



Make sure camshaft is well oiled

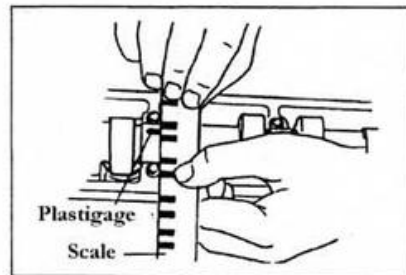

Using Plastigage, check clearance

Allowance 0.045-0.087(mm)

Limit 0.12(mm)

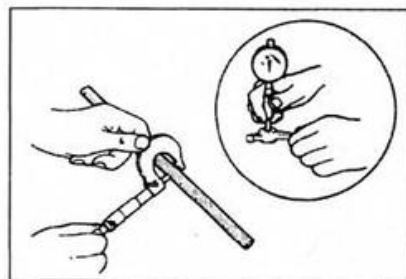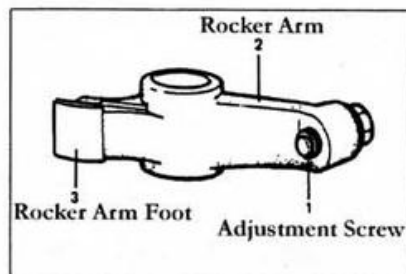


Rocker Arm Shaft Clearance

Allowance 0.005-0.040(mm)


Limit 0.006(mm)

Cylinder Head (4-Valve)

Valve Inspection

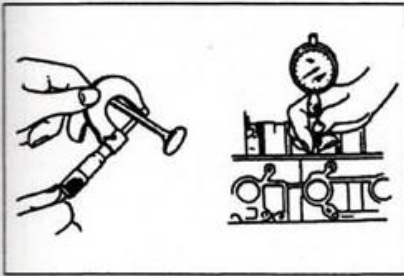


		(mm) Allowance	(mm) Limit
Valve Stem Diameter	I N	4.965~4.980	—
	E X	4.950~4.965	—
Valve Guide Inner-Dia	I N	5.000~5.012	5.04
	E X	5.000~5.012	5.04
Stem Guide	I N	0.020~0.047	0.07
	E X	0.035~0.062	0.09

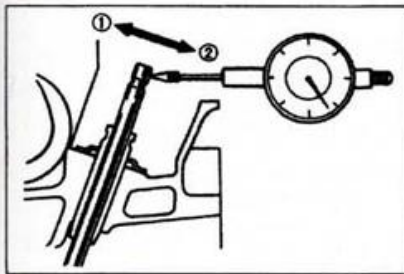

If a bore gage is not available, use a dial gage as in the example to the left


Limit= I N 0.14(mm)
EX 0.18(mm)

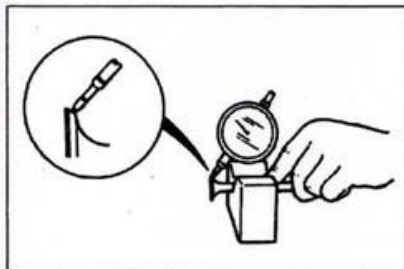

Using a V-Block and a dial gage check valve face

Limit= 0.08(mm)


Cylinder Head (4-Valve)

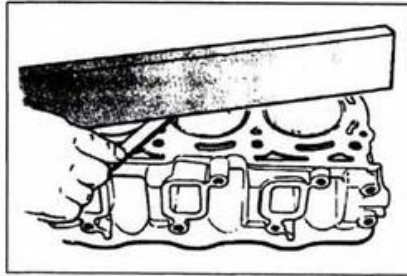

Surfaces



Using a straight edge and a feeler gage, check surface clearance

Allowance 0.05(mm)

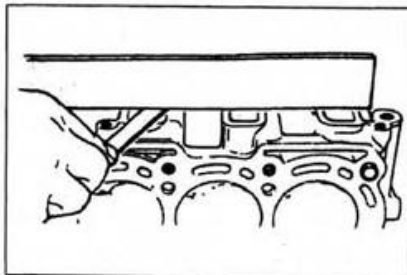

Using a straight edge check clearance

Manifold Face: Allowance 0.10(mm)

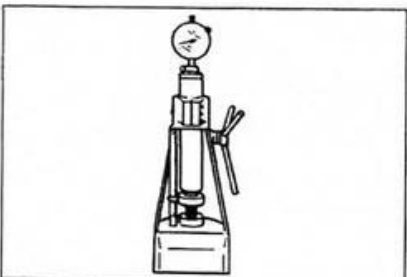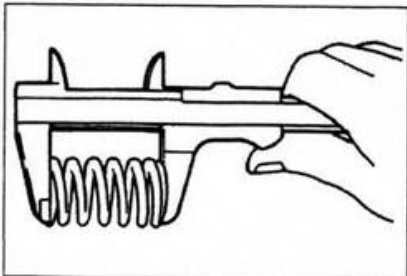


Valve Spring Chart


		Allowance	Limit
Valve Spring(mm)	Inner	32, 9	31, 8
	Outer	36, 6	35, 5
Valve Spring Pressure (kg/41, 5mm)		24, 8~29, 2	22, 8

Cylinder Head (4-Valve)

Assembly

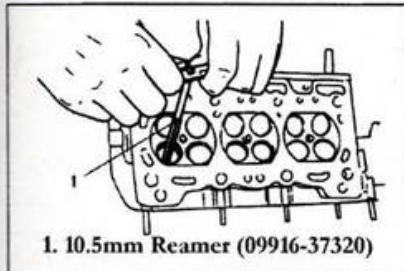

Using a 10.5(mm) reamer, ream out guide holes

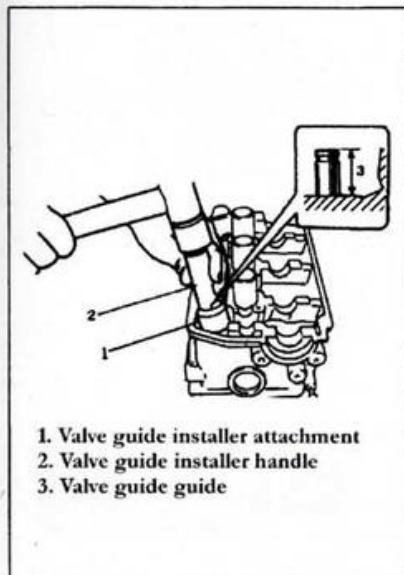


Warm cylinder head to between 80-100 degrees Celsius.

Use proper valve guide installation tools

Note-Never re-use valve guides

Maximum oversize guide use: 0.03(mm)

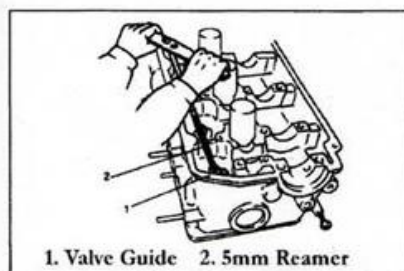


After guide installation, use a 5mm reamer to clean guide holes

Make sure no shavings are left in the holes


Cylinder Head (4-Valve)

Valve Spring

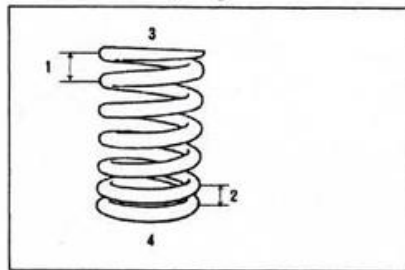

Assembly


1. Large Pitch Side
2. Small Pitch Side
3. Valve Spring Retainer Side
4. Valve Spring Seat Side

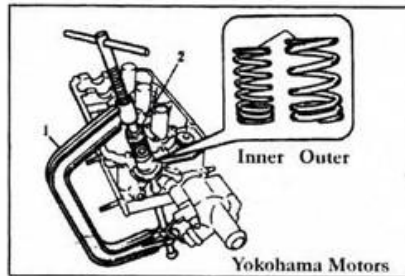

Assemble Springs and valves using a spring compressor as shown

Cylinder Head (4-Valve)


Assembly

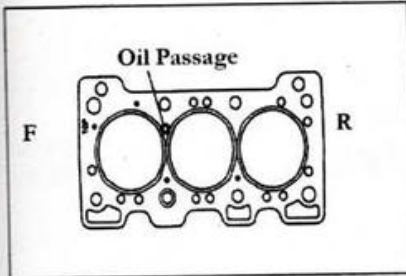




Install head gasket using the diagram on the left.

Make sure the gasket is oil free and clean

Do not use sealant on the head gasket

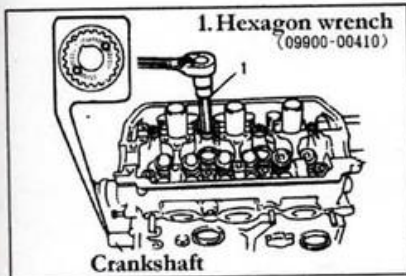


Cylinder Head Torque 600-650(kg.cm)

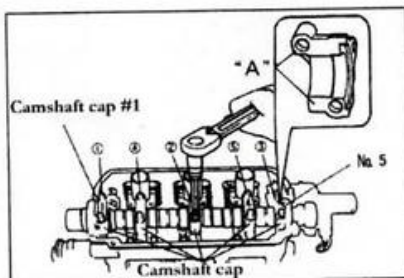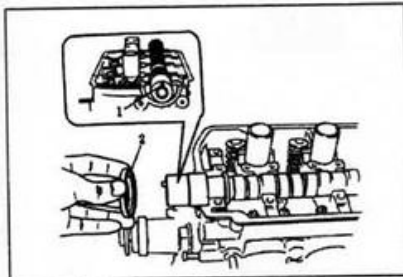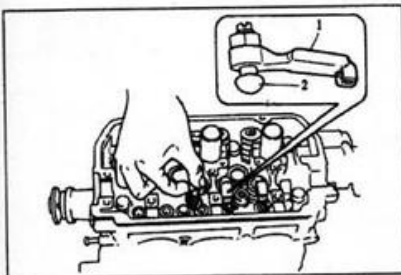

Camshaft Torque Spec


(kg.cm) 90-120

Cylinder Head (4-Valve)

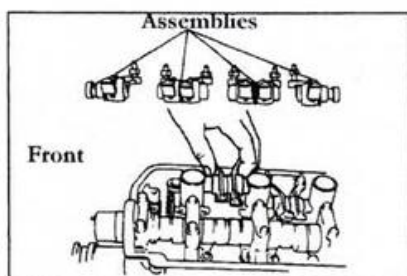

Assembly


Assemble Rocker Arms

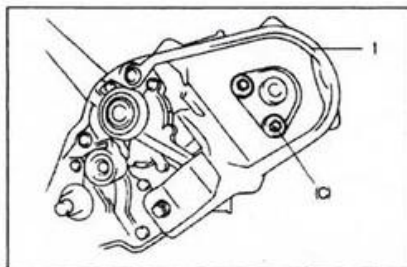

1. Timing Belt Inside Cover

Timing Belt Inside Cover (kg.cm) 90-120

Do not over torque

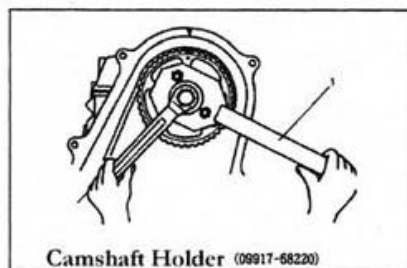


Set Camshaft pulley torque (kg.cm) 500-600

Assemble accessories and attachments


Set Valve Lash To Spec (see previous)

Piston & Rings-Connecting Rod-Cylinder

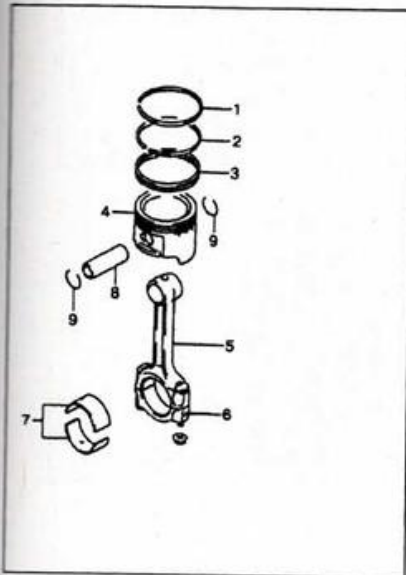


Piston Diagram 660cc 2 Valve and 4 Valve

1. Top Ring
2. 2nd Ring
3. Oil Ring
4. Piston Ring
5. Connecting Rod
6. Bearing Cap
7. Bearings
8. Piston Pin
9. C-Clip

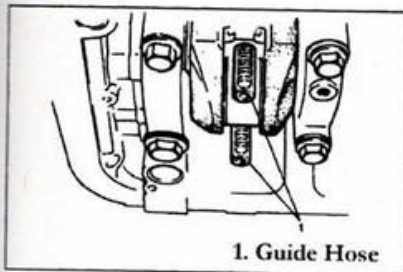

Note-When removing pistons place vacume hose or fuel hose over the bolt ends to prevent cylinder wall scratches during removal

Cylinder Diagram
Top


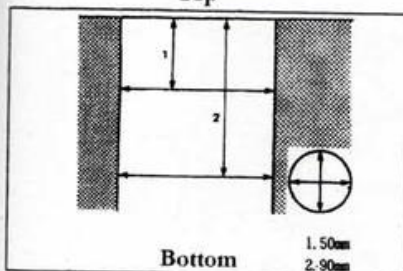


After piston removal check for a lip to determine excessive wearing. Excessive wearing will require cylinder boring. Oversize pistons and rings are available in 0.25(mm) or maximum 0.50(mm) sizes.

Use the chart on the left to determine diameter limits. The following charts and diagrams provide the correct sizes per boring requirements

Piston & Rings-Connecting Rod-Cylinder

Cylinder Bore Measurements

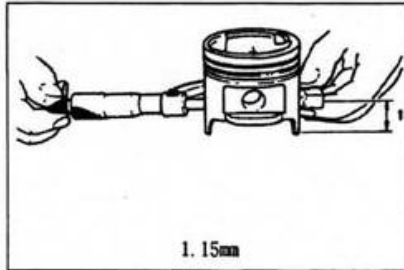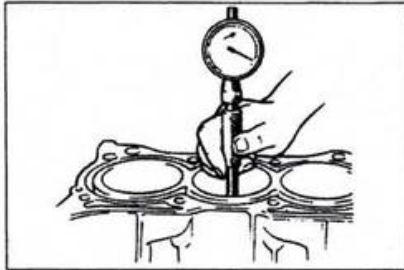

Cylinder Bore

Inside Diameter: 65.070(mm)

Taper Limit: 0.10(mm)


Note: If one or more cylinders are out of round or limits, all cylinders must be bored to the same size.

Piston Size

Piston Diameter (mm)	Allowance	64.965~64.985
	Over size 0.25	65.215~65.235
	Over size 0.50	65.465~65.485

Piston Rings

1. Piston Ring
2. Thickness Gage

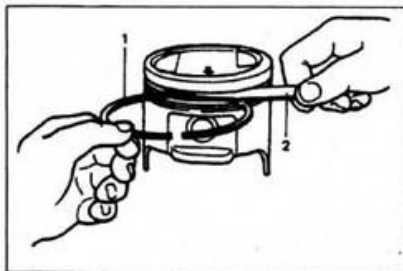

Ring Clearance Chart

Ring Side Clearance	Piston Ring	Allowance	Limit
	Top	0.03~0.07	0.12
	Second	0.02~0.06	0.10


Piston & Rings-Connecting Rod-Cylinder

Measure Ring End Gap

Before installing new piston rings, the ring end gap must be checked.


1. Cylinder Block
2. Feeler Gage
3. Piston Ring

Note: Check from top to bottom of cylinder

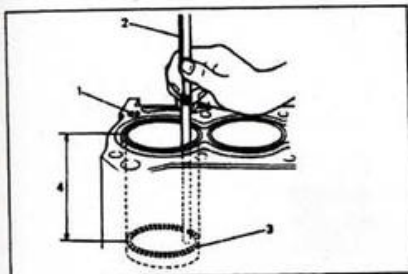

		Allowance	Limit
	Top Ring	0.12~0.27	0.7
	2nd Ring	0.15~0.30	0.7
	Oil Ring	0.20~0.70	1.8

Piston Pin

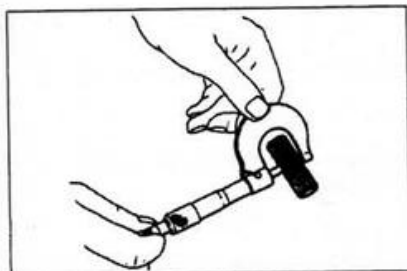


Piston Pin and Piston Boss Clearance

Piston Pin Hole		
	Allowance	
Outer	17.995~18.000 (15.995~16.000)	—
Piston Boss Inner Dia	18.006~18.014 (16.006~16.014)	—

() = 4 Valve


Connecting Rod Side Clearance

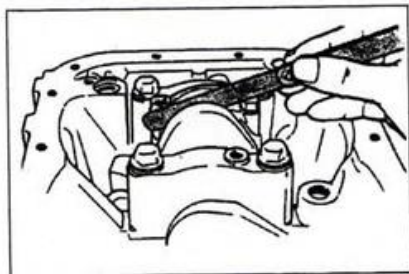

Connecting Rod Clearance

Allowance: 0.1-0.2(mm)

Piston & Rings-Connecting Rod-Cylinder

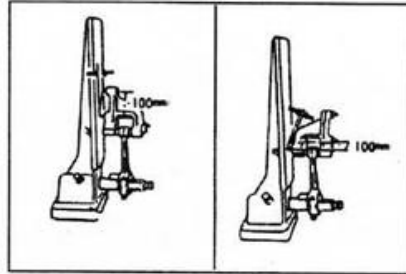

Alignment Machine

Connecting Rod Alignment

If a rod knocking noise was detected before disassembly, this test should be preformed

Bend Rate Failure @ 0.05(mm)

Twist Rate Failure @ 0.10(mm)

Connecting Rod Bearings


*Note: Do Not Remove Old Bearings With Sharp Tools
Damage Will Occure*

Note: Always replace both upper and lower bearing as a set

Note: If an irregularity is indicated, measure the crank journal with a micrometer

Note: Only standard (STD) replacement bearings available

*Warning: Do not rotate the crankshaft while
gaging material is between the
bearing and journal*

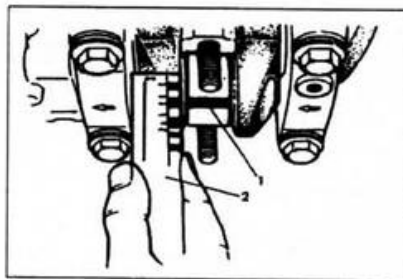

1. Plastigage 2. Scale

Bearing Clearance Measurement

Clearance

Allowance 0.020-0.040(mm)


Bearing Size

Normal: STD

Crankshaft (mm) 35.982-36.00

Bearing Cap Torque (kg.cm) 310-350

Piston & Rings-Connecting Rod-Cylinder

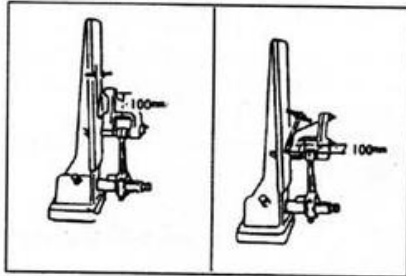

Alignment Machine

Connecting Rod Alignment

If a rod knocking noise was detected before disassembly, this test should be performed

Bend Rate Failure @ 0.05(mm)

Twist Rate Failure @ 0.10(mm)

Connecting Rod Bearings


*Note: Do Not Remove Old Bearings With Sharp Tools
Damage Will Occure*

Note: Always replace both upper and lower bearing as a set

Note: If an irregularity is indicated, measure the crank journal with a micrometer

Note: Only standard (STD) replacement bearings available

Warning: Do not rotate the crankshaft while gaging material is between the bearing and journal

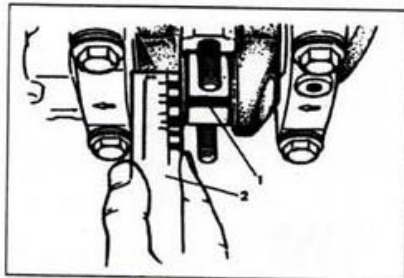

1. Plastigage 2. Scale

Bearing Clearance Measurement


Clearance
Allowance 0.020-0.040(mm)

Bearing Size
Normal: STD
Crankshaft (mm) 35.982-36.00

Bearing Cap Torque (kg.cm) 310-350

Piston & Rings-Connecting Rod-Cylinder

Piston Assembly

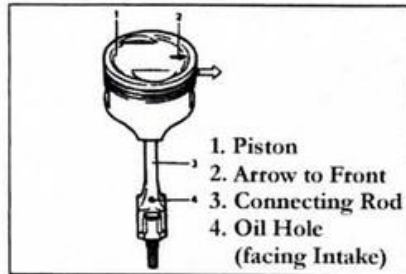


Note: Always use new piston rings


Install the connecting rod to the piston, making sure the piston direction arrow on the piston facing the front of the engine.

Make sure the piston pin is well lubricated, install retaining clips and verify they are well seated.


Piston Ring Chart

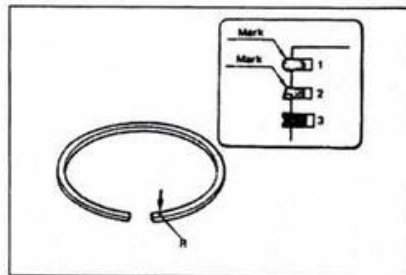


Ring Gap Location

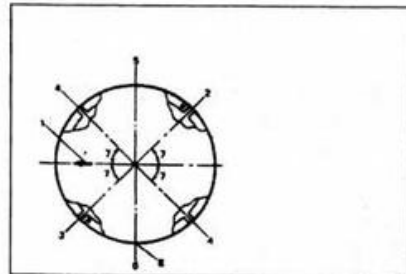

Use the chart to the left for Ring Gap Direction

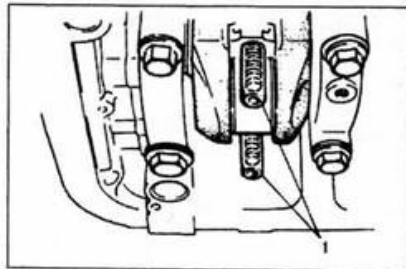

Main Bearing-Crankshaft, Cylinder Block

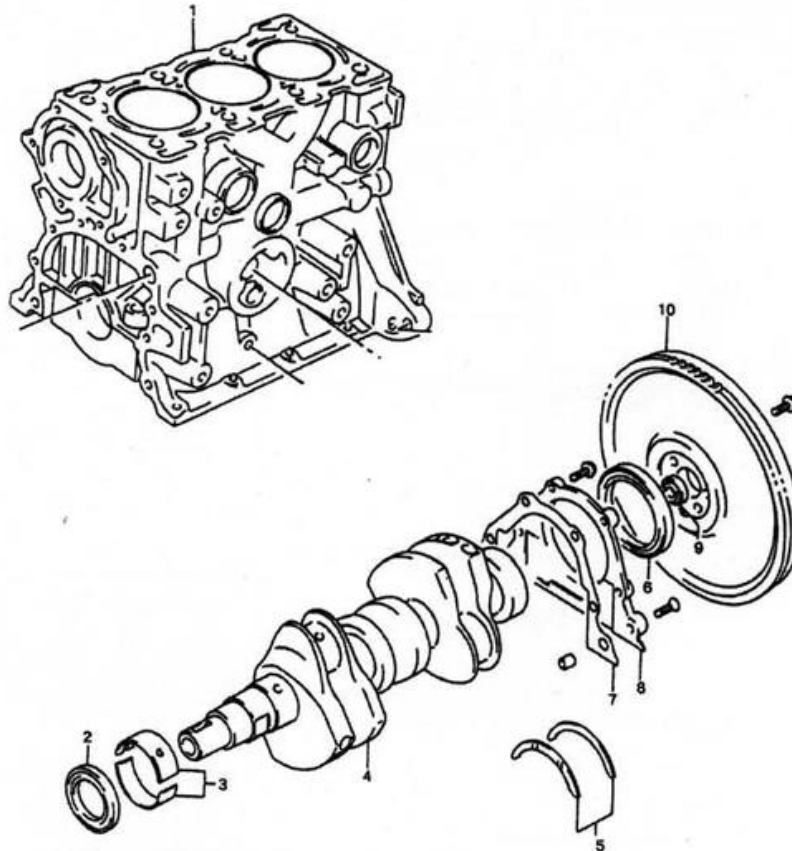

- 1. Cylinder Block
- 2. Front Main Seal
- 3. Main Bearing
- 4. Crankshaft


- 5. Thrust Bearing
- 6. rear Oil Seal
- 7. Oil Seal Housing Gasket
- 8. Oil Seal Housing

- 9. Input Shaft Bearing
- 10. Flywheel

Yokohama Motors

Main Bearing-Crankshaft, Cylinder Block


Crankshaft Inspection

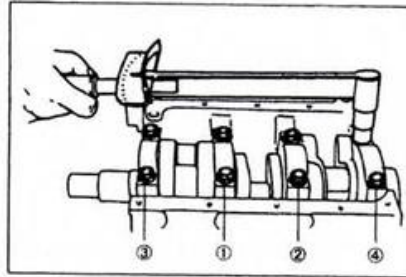

***Note:** Before removing crankshaft verify previous torque setting were correct

Follow the torque sequence guild to the left.
Torque should be (kg.cm) 550-600


Remove Crankshaft

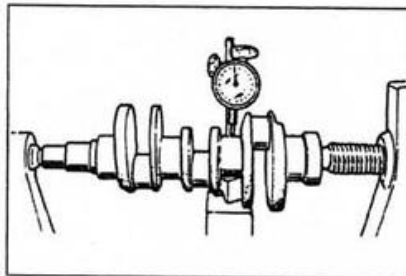

Crankshaft Journal Taper/Out of round Limit
Using a dial gage check the crankshaft. The test should involve minimum 3 turns per Journal

Out of round Limit: 0.03(mm)

Thrust Bearing

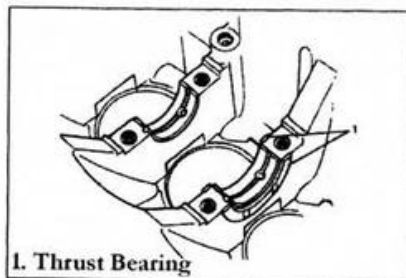

Inspect thrust bearings for unusual ware.


Remove thrust bearings and discard

***Not: Do not re-use thrust bearings**

Replace with new bearings

Main Bearing-Crankshaft, Cylinder Block


Crankshaft Inspection

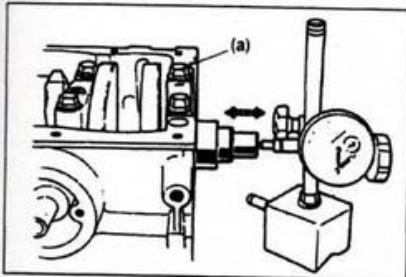

Main Bearing torque (kg.cm) 550-600

Crankshaft End-Play


Allowance: 0.13-0.28(mm)

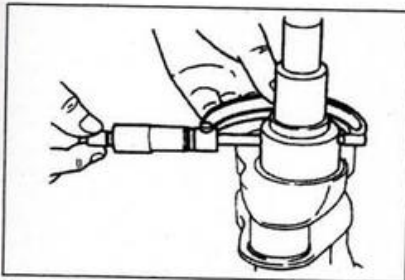

Using a micrometer, check journal taper

Crankshaft Journal STD
43.982-44.000(mm)

Journal Taper Allowance: 0.01(mm)

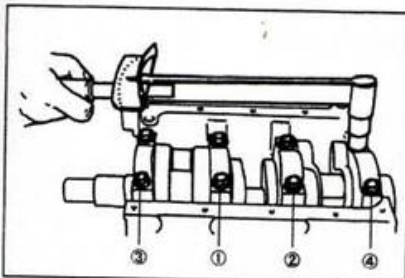


Re-Install Crankshaft and torque to Spec

Torque (kg.cm) 550-600

Use the diagram on the left for sequence

Crankshaft Bearing Oil Hole

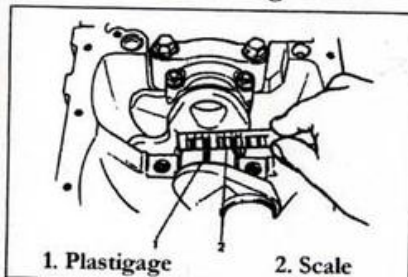


Crankshaft Bearing Orifice
(Oil Hole)

Allowance: 0.020-0.040(mm)


Main Bearing-Crankshaft, Cylinder Block

1. Rear Oil Seal

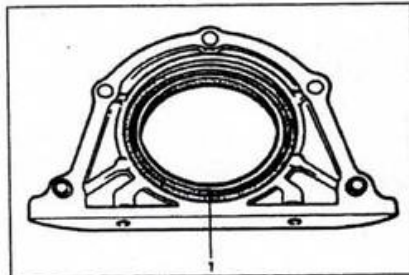

Install new rear oil seal


*Note: Take caution not to damage seal Lip

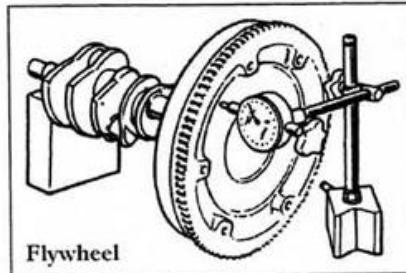

Flywheel Roundness Check

Limit (mm) 0.2

Flywheel Torque: (kg.cm) 400-450

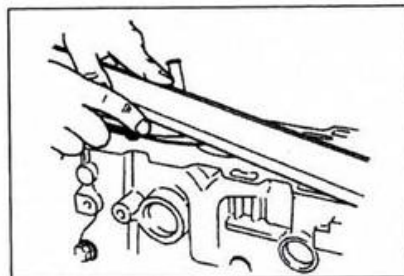


Using a straight edge bar and a feeler gage check head deck for levelness

Allowance: 0.05(mm)

Out of spec, have deck re-surfaced


Engine Related Diagrams & Part Numbers

Engine Gasket Set (4V)

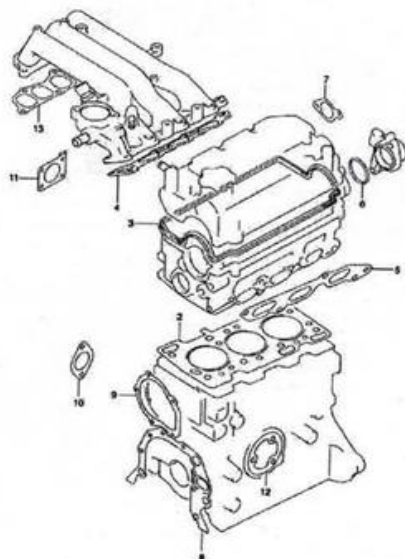

- | | |
|----------------------|---------------------------------------|
| 1. #11402-78881 | Gasket Set: Engine |
| 2. #11141-81401 | Gasket: Cylinder Head |
| 3. #11189-81402 | Gasket: Cylinder Head Cover |
| 4. #13119-71G00 | Gasket: Intake Manifold |
| 5. #14114-63F00 | Gasket: Exhaust Manifold |
| 6. #11162-81400 | O Ring |
| 7. #17699-53F01 | Gasket |
| 8. #16119-76G00 | Gasket: Oil Pump |
| 9. #17431-73001 | Gasket: Water Pump |
| 10. #17559-73000-H17 | Gasket: Water Inlet |
| 11. #13421-77G00 | Gasket: Throttle Body |
| 12. #16539-76001 | Gasket: Oil Filter Adapter Case (4WD) |
| 13. 13139-60H30 | Gasket |


Engine Gasket Set (4V)

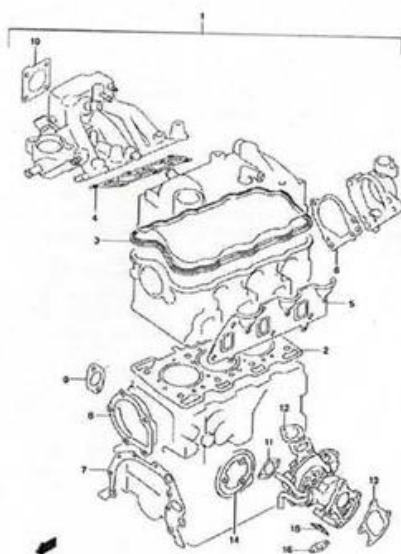

Turbo-4V

- | | | |
|------|-----------------|---|
| 1-1 | 11401-78894 | Gasket Set, Engine |
| 1-2 | 11401-60810 | Gasket Set, Engine: DAS2V-DBS2V-DA52W |
| 2 | 11141-81401 | Gasket: Cylinder Head |
| 3 | 11189-70D50 | Gasket: Valve Cover |
| 4 | 13119-84360 | Gasket: Intake Manifold |
| 5 | 14141-67F02 | Gasket: exhaust Manifold |
| 6-1 | 11169-70D00 | Gasket: Case |
| 6-2 | 11169-76G00 | Gasket: Case DAS2T-DBS2T-DA52V-DBS2V-DA52W |
| 7 | 16119-76G00 | Gasket: Oil Pump Case |
| 8 | 17431-73001 | Gasket: Water Pump |
| 9 | 17559-73000-H17 | Gasket: Water Inlet |
| 10 | 13421-77G00 | Gasket: Throttle Body |
| 11 | 13955-56F00 | Gasket: Intake Air Pipe |
| 12 | 13965-56F00 | Gasket: Outlet Air Pipe |
| 13-1 | 14182-72B51 | Gasket: Turbo Outlet Pipe |
| 13-2 | 14182-60H50 | Gasket: Turbo Outlet Pipe DAS2V-DBS2V-DA52W |
| 14 | 16539-76001 | Gasket: Oil Filter Adapter Case |
| 15 | 14181-81051 | Gasket: Exhaust No.1 |
| 16 | 13945-70G50 | Gasket: Oil Drain |


Cylinder Head (4V)

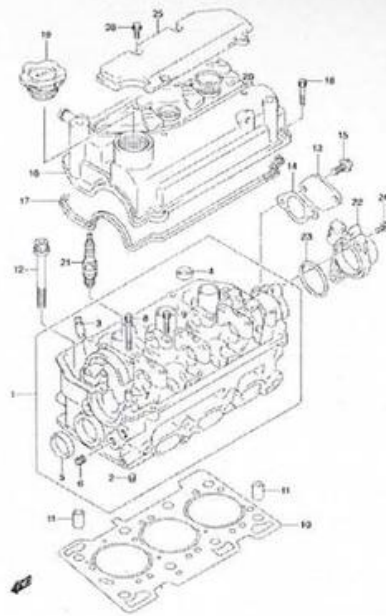

DASZT-2 503
CYLINDER HEAD (4V)


- | | | |
|-------|-----------------|-------------------------------|
| 1. | 11100-77G00 | Cylinder Head Assembly |
| 2. | 11112-53A00 | Plug: Oil Venturi |
| 3. | 11115-77G00-001 | Valve Guide |
| 4. | 09241-20006 | Plug, Outside Diameter:20 |
| 5. | 09241-30009 | Plug, OD:30 |
| 6. | 09246-05006 | Plug, 1/8PT, Hi5.5 |
| 7. | 09206-08001 | Pin, 6.2x8x11 |
| 8. | 07130-06403 | Bolt |
| 9. | 09103-06185 | Bolt, 6x20 |
| 10. | 11141-81401 | Gasket: Cylinder Head |
| 11. | 04211-13189 | Pin |
| 12. | 1117-52E10 | Bolt: Cylinder Head |
| 13. | 11116-79A00 | Plate: Cylinder Head |
| 14. | 17699-53F01 | Gasket |
| 15. | 01550-08203 | Bolt |
| 16. | 11170-79A01 | Cover: Cylinder Head |
| 17. | 11189-81402 | Gasket: Cylinder Head Cover |
| 18. | 01550-06253 | Bolt |
| 19. | 16920-86502 | Cap: Oil Filter |
| 20. | 11179-81402 | O Ring |
| 21-1. | #09482-00448 | Spark Plug: DCPR7E (NGK) |
| 21-2. | #09482-00449 | Spark Plug: XU22EPR-U (Denso) |
| 22. | 33221-76G00 | Case: Cam Position Sensor |
| 23. | 11162-81400 | O Ring |
| 24. | 01550-06203 | Bolt |
| 25. | 11189-77G00 | Cover: Cylinder Head Upper |
| 26. | 01547-06163 | Bolt |

Cylinder Head (Turbo)

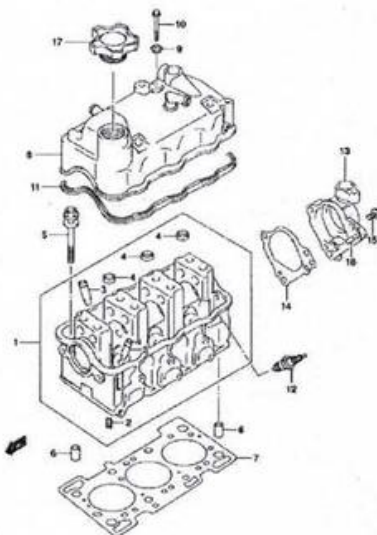

CYLINDER HEAD (TURBO)


- | | | |
|-------|------------------|---------------------------------|
| 1. | 11110-7002 | Cylinder Head |
| 2. | 11112-73002 | Plug: Oil Venturi |
| 3. | 11115-62D00-001 | Valve Guide |
| 4. | 09241-20006 | Plug: OD:20 |
| 5. | 09116-101116 | Bolt 10x87 |
| 6. | 04211-13189 | Pin |
| 7. | 11141-81401 | Gasket: Cylinder Head |
| 8. | 11170-60H50 | Cover: Cylinder Head |
| 9. | 11180-60B00 | Seal/Washer Cylinder Head Cover |
| 10. | 09113-06002 | Bolt 6x65 |
| 11. | 11189-70D50 | Cover Gasket |
| 12-1. | BPR5E (NGK) | Spark Plug |
| 12-2. | W16EPR-U (Denso) | Spark Plug |
| 13. | 11161-78A50 | Case: Cam Position Sensor |
| 14. | 11169-76G00 | Gasket |
| 15. | 09103-08152 | Bolt 8x25 |
| 16. | 04221-06129 | Pin |
| 17. | 16920-86502 | Cap: Oil Filter |

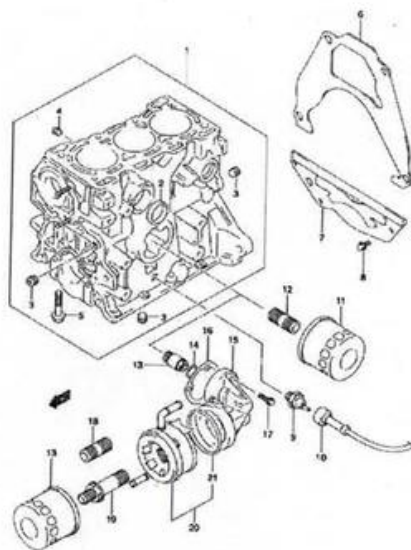

Cylinder Block

- | | | |
|-------|--------------|----------------------------------|
| 1-1. | 11200-53F10 | Block Assembly (4V) |
| 1-2. | 11200-55F00 | Block Assembly (Turbo) |
| 2. | 09241-300009 | Plug, OD:30 |
| 3. | 09246-60002 | Plug, 1/4PT, H:7.5 |
| 4. | 09246-05006 | Plug, 1/8PT, H:5.5 |
| 5. | 09103-10022 | Bolt 10x54 |
| 6-1. | 11310-78A00 | Plate: Clutch Housing Upper (MT) |
| 6-2. | 11311-78A20 | Plate: Clutch Housing Upper (AT) |
| 7-1. | 11320-78A02 | Plate: Clutch Housing Lower (MT) |
| 7-2. | 11320-78A21 | Plate: Clutch Housing Lower (AT) |
| 8-1. | 01550-06103 | Bolt (MT) |
| 8-2. | 01550-06103 | Bolt (AT) |
| 9. | 37820-82001 | Oil Pressure Switch |
| 10. | 36895-78A01 | Oil Pressure Wire |
| 11-1. | 16510-82703 | Oil Filter (Tokyo ROKI) |
| 11-2. | 16510-81403 | Oil Filter (Denso) |
| 12. | 11241-7300 | Adapter Pipe |
| 13. | 11241-85400 | Oil Filter (4V-4WD-Turbo) |
| 14. | 09280-16005 | O Ring |
| 15. | 16530-78A00 | Case: Oil Cooler Adapter |
| 16. | 16539-76001 | Gasket |
| 17. | 01550-06253 | Bolt |
| 18. | 11241-73003 | Adapter Adapter Pipe |
| 19. | 11241-82C00 | Oil Cooler Adapter Pipe |
| 20. | 16600-78A00 | Oil Cooler Assembly |
| 21. | 16221-78A00 | Gasket |

Cylinder Block

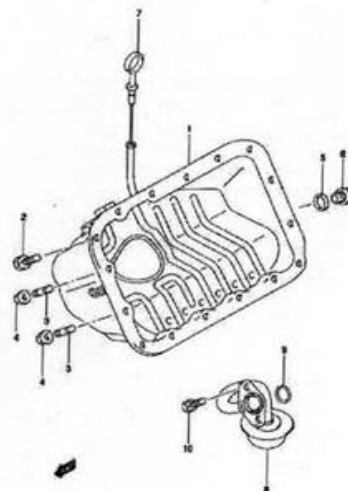


Oil Pan

- | | | |
|-----|-------------|-----------------------------|
| 1. | 11510-78A10 | Oil Pan |
| 2. | 09117-06033 | Bolt 6x12 |
| 3. | 01411-06123 | Stud |
| 4. | 08316-10063 | Nut |
| 5. | 09247-14027 | Plug |
| 6. | 09168-14015 | Gasket |
| 7. | 16910-78A01 | Oil Level Stick (Dip Stick) |
| 8. | 16520-78A00 | Strainer |
| 9. | 09280-16005 | O Ring |
| 10. | 01570-06163 | Bolt |

Oil Pan


Crankshaft (4V)

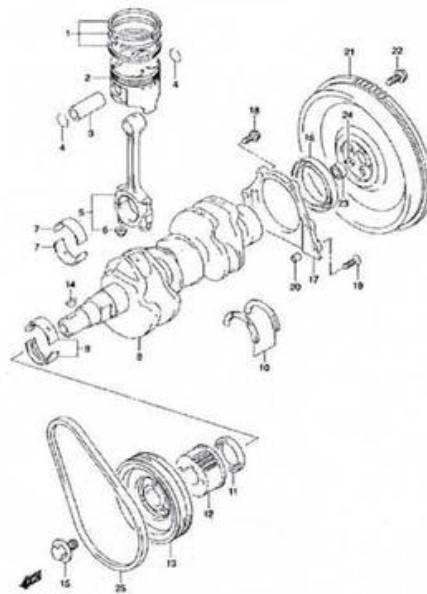

- | | | |
|-------|-----------------|--------------------------------|
| 1-1. | 12140-51F10 | Ring Set: Piston STD |
| 1-2. | 12140-51F10-025 | Ring Set: Piston OS: 0.25 |
| 1-3. | 12140-51F10-050 | Ring Set: Piston OS: 0.50 |
| 2-1. | 12111-71G00-0B0 | Piston: STD |
| 2-2. | 12111-71G00-025 | Piston: OS: 0.25 |
| 2-3. | 12111-71G00-050 | Piston: OS: 0.50 |
| 3. | 12151-78110 | Piston Pin |
| 4. | 09381-16001 | Snap Ring |
| 5. | 12160-60D02 | Connecting Rod Assembly |
| 6. | 09159-08033 | Nut |
| 7-1. | 12181-81401-0A0 | Con Rod Bearing STD |
| 7-2. | 12181-81401-025 | Con Rod Bearing US: 0.25 |
| 8. | 12221-50E00 | Crankshaft |
| 9-1. | 12300-61810-0A0 | Crankshaft Bearing Set STD |
| 9-2. | 12300-61810-025 | Crankshaft Bearing Set US:0.25 |
| 10-1. | 12300-82820 | Thrust Bearing: T:2.5 |
| 10-2. | 12300-82820-012 | Thrust Bearing: T:2.563 |
| 11. | 09283-32042 | Oil Seal 32x47x6 |
| 12. | 12631-61D01 | Timing Belt Pulley |
| 13. | 12610-61H00 | Crankshaft Pulley |
| 14. | 08341-31059 | Key |
| 15. | 12619-60B00 | Crankshaft Pulley Bolt |

Crankshaft (4V)


Crankshaft (4V) Part 2

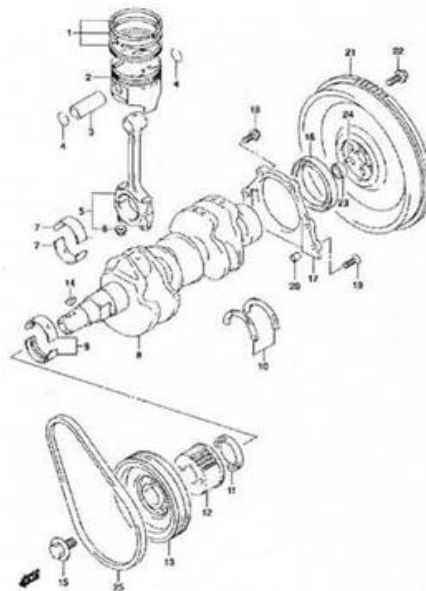

- | | | |
|-------|-------------|-----------------------------------|
| 16. | 09283-60005 | Oil Seal, 60x80x8 |
| 17. | 11341-70B01 | Housing Oil Seal |
| 18. | 01550-06203 | Bolt |
| 19. | 02122-06253 | Screw |
| 20. | 04211-09109 | Pin |
| 21. | 12620-78A00 | Flywheel |
| 22. | 09103-10097 | Bolt 10x17 |
| 23. | 12623-70B00 | Bearing: Input Shaft |
| 24-1. | 04221-06129 | Pin (MT) |
| 24-2. | 09205-06009 | Spring Pin 6x14 (AT) |
| 25. | 17521-78A01 | Belt: Alternator L:758mm (LFM-30) |


Crankshaft (4V)

Crankshaft (Turbo)

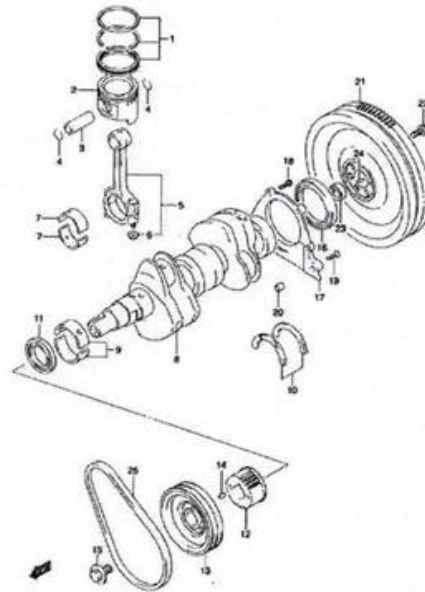

- | | | |
|-------|-----------------|------------------------------------|
| 1-1. | 12140-50E50 | Ring Set: Piston STD |
| 1-2. | 12140-50E50-025 | Ring Set: Piston OS 0.25 |
| 1-3. | 12140-50E50-050 | Ring Set: Piston OS 0.50 |
| 2-1. | 12111-78A50-0B0 | Piston: STD (Truck) |
| 2-2. | 12111-60D51-0B0 | Piston: STD (Van) |
| 2-3. | 12111-78A50-025 | Piston: OS 0.25 (T) |
| 2-4. | 12111-60D51-025 | Piston: OS 0.25 (Van) |
| 2-5. | 12111-78A50-050 | Piston: OS 0.50 (Truck) |
| 2-6. | 12111-60D51-050 | Piston: OS 0.50 (Van) |
| 3. | 12151-54A50 | Piston Pin (T&V) |
| 4. | 09381-18005 | Snap Ring |
| 5-1. | 12160-76G50 | Connecting Rod Assembly (T) |
| 5-2. | 12160-60d51 | Connecting Rod Assembly (V) |
| 6. | 09159-08033 | Nut |
| 7-1. | 12181-81401-0A0 | Con Rod Bearing (T) |
| 7-2. | 12181-81051-0A0 | Con Rod Bearing (V) |
| 7-3. | 12181-81401-025 | Bearing: UnderSize: 0.25 (T) |
| 7-4. | 12181-81051-025 | Bearing: US 0.25 (Van) |
| 8-1. | 12221-50E00 | Crankshaft (T) |
| 8-2. | 12221-60H50 | Crankshaft (V) |
| 9-1. | 12300-61810-0A0 | Bearing Set Crankshaft STD (T & V) |
| 9-2. | 12300-61810-025 | Bearing US: 0.25 (T&V) |
| 10-1. | 12300-82820 | Thrust Bearing T:2.5 |
| 10-2. | 12300-82820-012 | Thrust Bearing T:2.563 |
| 11. | 09283-32042 | Oil Seal 32x47x6 |


Crankshaft (Turbo)

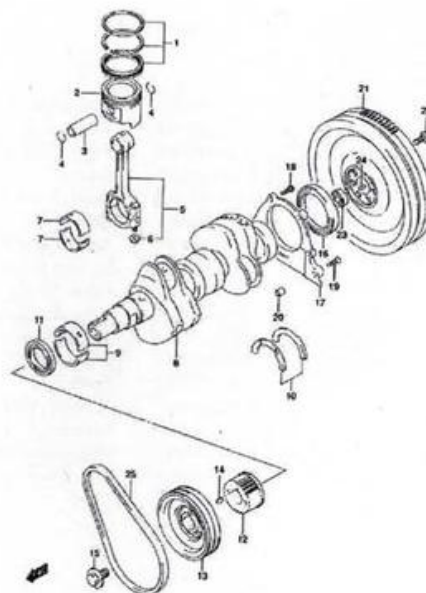

- | | | |
|-------|-------------|-----------------------------------|
| 12. | 12631-61D01 | Timing Belt Pulley |
| 13. | 12610-61H00 | Crankshaft Pulley |
| 14. | 08341-31059 | Key |
| 15. | 12619-60B00 | Crankshaft Pulley Bolt |
| 16. | 09283-60005 | Oil Seal 60x80x8 |
| 17. | 11341-70B01 | Oil Seal |
| 18. | 01550-06203 | Bolt |
| 19. | 02122-06253 | Screw |
| 20. | 04211-09109 | Pin |
| 21. | 12620-78A00 | Flywheel |
| 22. | 09103-10097 | Bolt 10x17 |
| 23. | 12623-70B00 | Bearing: Input Shaft |
| 24-1. | 04221-06129 | Pin (MT) |
| 24-2. | 09205-06009 | Spring Pin 6x14 (AT) |
| 25. | 17521-78A01 | Alternator Belt: L:758mm (LFM-30) |

Crankshaft (Turbo)


Camshaft-Valves (4V)

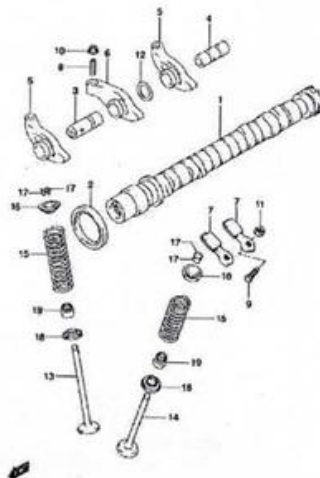

- | | |
|-----------------|--------------------------|
| 1. 12710-7900 | Camshaft |
| 2. 09283-35047 | Oil Seal 35x47x6 |
| 3. 12861-71G00 | Shaft: Rocker Arm No. 1 |
| 4. 12862-71G00 | Shaft: Rocker Arm No.2 |
| 5. 12841-77G11 | Rocker Arm: Intake No.1 |
| 6. 12844-77G11 | Rocker Arm: Intake No.2 |
| 7. 12845-77G00 | Rocker Arm: Exhaust |
| 8. 12842-77G00 | Adjustment Screw: Intake |
| 9. 12846-61D00 | Adjustment Screw |
| 10. 12843-32400 | Nut |
| 11. 12843-66D00 | Nut |
| 12. 12891-81410 | Washer |
| 13. 12911-77G00 | Valve: Intake |
| 14. 12915-77G00 | Valve: Exhaust |
| 15. 12921-51E00 | Spring: Valve |
| 16. 12931-77G00 | Retainer |
| 17. 12932-24400 | Keeper (Valve) |
| 18. 12933-51E00 | Seat: Valve Spring |
| 19. 09289-05012 | Seal: Valve Stem |

Camshaft-Valves (4V)


Camshaft-Valves (Turbo)

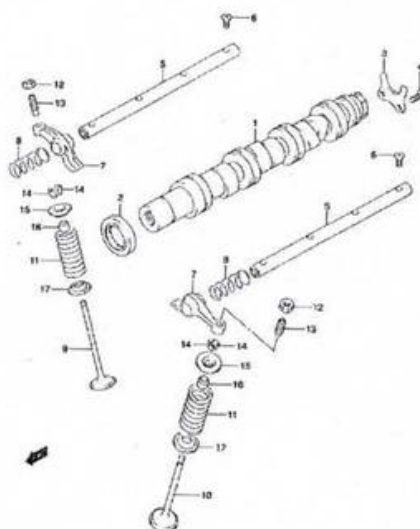

- | | |
|-----------------|------------------------|
| 1. 12710-60H50 | Camshaft |
| 2. 09283-32042 | Oil Seal 32x47x6 |
| 3. 12749-73002 | Plate: Camshaft Thrust |
| 4. 02122-06123 | Screw |
| 5. 12860-78102 | Shaft: Valve Rocker |
| 6. 02122-06163 | Screw |
| 7. 12841-77300 | Arm: Valve Rocker |
| 8. 12891-51G00 | Spring: Rocker Arm |
| 9. 12911-70B30 | Valve: Intake |
| 10. 12915-70B00 | Valve: Exhaust |
| 11. 12921-60H00 | Spring: Valve |
| 12. 09159-07002 | Nut |
| 13. 12848-73010 | Screw |
| 14. 12932-24400 | Keeper (Valve) |
| 15. 12931-60B01 | Retainer |
| 16. 09289-05012 | Valve Stem Seal |
| 17. 12933-86510 | Seat: Valve Spring |

Camshaft-Valves (Turbo)


Timing Belt (4V)

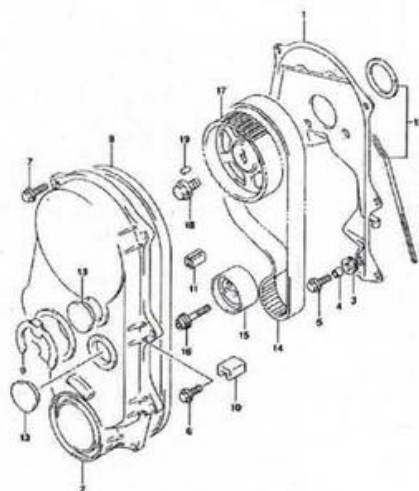

- | | |
|-----------------|---------------------------------|
| 1. 11360-79A00 | Cover: Timing Belt Inside |
| 2. 11390-77G01 | Cover: Outside |
| 3. 09308-10004 | Grommet |
| 4. 09180-06106 | Spacer 6.8x10x7 |
| 5. 09116-06167 | Bolt 6x20 |
| 6. 01550-06163 | Bolt |
| 7. 01550-06203 | Bolt |
| 8. 11396-77G00 | Seal: Timing Belt Cover-Outside |
| 9. 11397-76G00 | E-Ring: Timing Belt Cover |
| 10. 11394-77G00 | Seal |
| 11. 11394-70B00 | Seal |
| 12. 11480-77G00 | Seal Set: Timing Cover-Inside |
| 13. 09250-30017 | Cap: OD:36 |
| 14. 12761-79A00 | Belt: Timing |
| 15. 12810-76G00 | Tensioner |
| 16. 12815-76G00 | Bolt: Tensioner |
| 17. 12741-61D01 | Pulley: Camshaft Timing |
| 18. 01550-12253 | Bolt |
| 19. 09206-05001 | Pin |

Timing Belt (4V)


Timing Belt (Turbo)

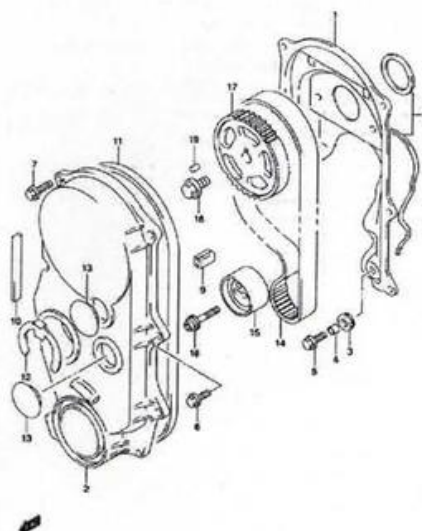

- | | |
|-----------------|------------------------------|
| 1. 11360-78A00 | Cover: Timing Belt-Inside |
| 2. 11390-76G01 | Cover: Outside |
| 3. 09308-10004 | Grommet |
| 4. 09180-06106 | Spacer: 6.8x8x10x7 |
| 5. 09116-06167 | Bolt 6x20 |
| 6. 01550-06163 | Bolt |
| 7. 01550-06203 | Bolt |
| 8. 11480-76G00 | Seal Set:Timing Cover-Inside |
| 9. 11394-70B00 | Seal |
| 10. 11395-76G00 | Seal |
| 11. 11396-76G00 | Seal |
| 12. 11397-76G00 | E Ring: Timing Cover |
| 13. 09250-30017 | Cap: OD:36 |
| 14. 12761-78A00 | Belt: Timing |
| 15. 12810-76G00 | Tensioner |
| 16. 12815-76G00 | Tensioner Bolt |
| 17. 12741-70D00 | Pulley: Camshaft Timing |
| 18. 01550-12253 | Bolt |
| 19. 09206-05001 | Pin |

Timing Belt (Turbo)


Intake Manifold/Throttle Body (4V)

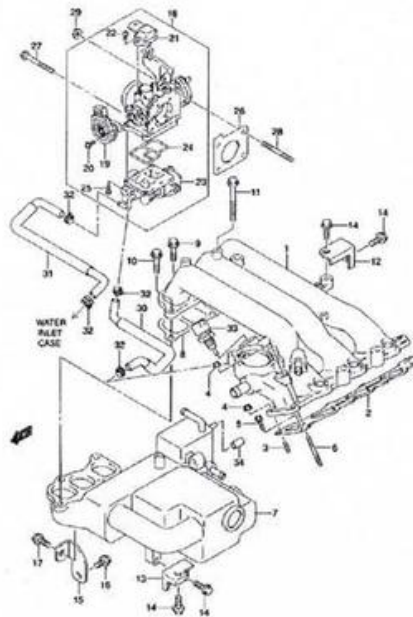

Intake Manifold/Throttle Body (4V)

- | | | |
|-----|-------------|-------------------------------|
| 1. | 13110-60H30 | Intake Manifold |
| 2. | 13119-71G00 | Gasket: Intake Manifold |
| 3. | 01411-06203 | Stud Bolt |
| 4. | 08316-10063 | Nut |
| 5. | 01550-06203 | Bolt |
| 6. | 01411-06603 | Stud Bolt |
| 7. | 13130-60H30 | Surge Tank |
| 8. | 13139-60H30 | Gasket: Surge Tank |
| 9. | 01550-08253 | Bolt |
| 10. | 01550-08303 | Bolt |
| 11. | 01550-08803 | Bolt |
| 12. | 13161-60H30 | Bracket: Intake Manifold No.1 |
| 13. | 13162-60H30 | Bracket: Intake Manifold No.2 |
| 14. | 01550-08203 | Bolt |
| 15. | 13163-60H30 | Bracket: Surge Tank |
| 16. | 01550-08163 | Bolt |
| 17. | 01550-08203 | Bolt |
| 18. | 13400-60H30 | Throttle Body Assembly |
| 19. | 13420-77G00 | Throttle Body Position Sensor |
| 20. | 13428-77G10 | Screw |
| 21. | 18590-72F21 | Pressure Sensor |
| 22. | 13601-05148 | Screw 5x14 |
| 23. | 18117-60H30 | Valve: Idle Throttle Control |
| 24. | 14139-77G10 | Gasket: Valve |
| 25. | 13601-05148 | Screw 5x14 |


Intake Manifold/Throttle Body (4V) Part 2

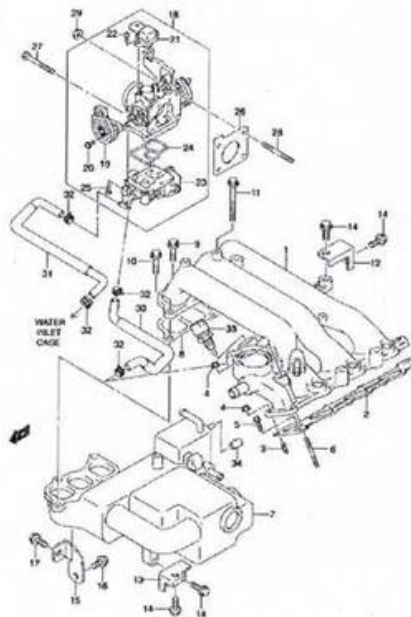

Intake Manifold/Throttle Body (4V) Part 2

- | | | |
|-----|-------------|-----------------------|
| 26. | 13421-77G00 | Gasket: Throttle Body |
| 27. | 01550-06503 | Bolt |
| 28. | 01421-06453 | Stud Bolt |
| 29. | 08316-10063 | Nut |
| 30. | 13491-60H30 | Hose: Water-TB Inlet |
| 31. | 13492-60H30 | Hose: Water-TB Outlet |
| 32. | 09401-12410 | Clip |
| 33. | 13650-50F10 | Water Pressure Sensor |
| 34. | 09250-04003 | Plug: OD:8 |


Intake Manifold/Throttle Body (Turbo)

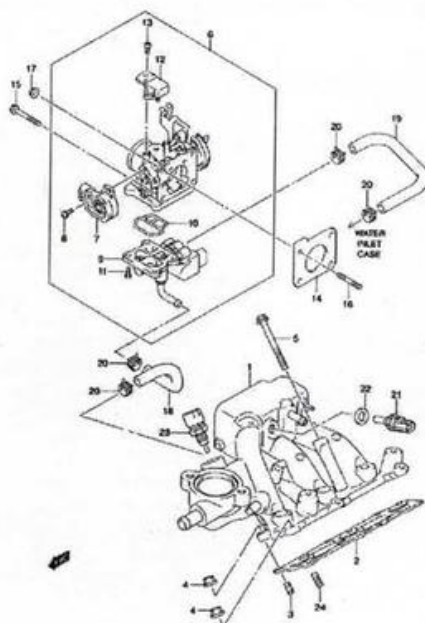

- | | |
|-----------------|--------------------------|
| 1. 13110-60H50 | Intake Manifold |
| 2. 13119-84360 | Gasket: Intake Manifold |
| 3. 01411-08203 | Stud Bolt |
| 4. 08316-10083 | Nut |
| 5. 01550-08953 | Bolt |
| 6. 13400-78A50 | Throttle Body Assembly |
| 7. 13420-77G00 | Throttle Position Sensor |
| 8. 13428-77G10 | Screw |
| 9. 18117-78A50 | Valve: Idle Control |
| 10. 14139-70G30 | Gasket |
| 11. 13601-05148 | Screw 5x14 |
| 12. 18590-76G50 | Pressure Sensor |
| 13. 13428-77G10 | Screw |
| 14. 13421-77G00 | Throttle Body Gasket |
| 15. 01550-06503 | Bolt |
| 16. 01421-06453 | Stud Bolt |
| 17. 08316-10063 | Nut |
| 18. 13491-78A50 | Hose: Water Inlet |
| 19. 13492-78A50 | Hose: Water Outlet |
| 20. 09401-12410 | Clip |
| 21. 13650-61B00 | Temp Sensor |
| 22. 09168-12016 | Gasket: 12.2x21x0.8 |
| 23. 13650-50F10 | Water Temp Sensor |
| 24. 01411-08253 | Stud Bolt |

Intake Manifold/Throttle Body (Turbo)


Water Pump (All)

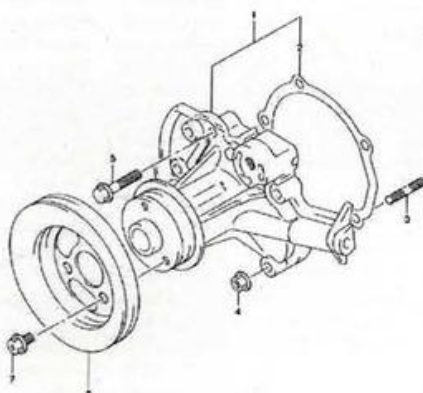

- | | |
|----------------|---------------------------|
| 1. 17400-78880 | Water Pump Set (Assembly) |
| 2. 17431-73001 | Gasket: Water Pump |
| 3. 01411-06253 | Stud Bolt |
| 4. 08316-10063 | Nut |
| 5. 01550-06303 | Bolt |
| 6. 17511-76G10 | Water Pump Pulley |
| 7. 02162-06103 | Bolt |


Water Pump (All)

Turbocharger (Turbo)

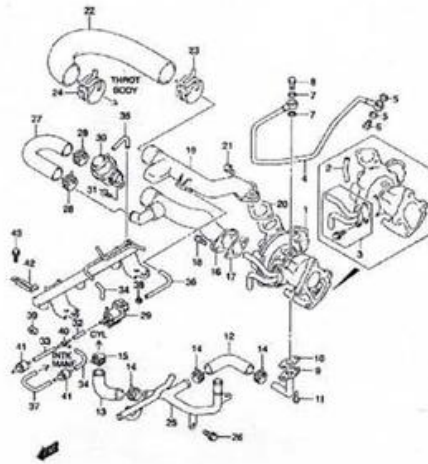

- | | | |
|---------|-----------------|---------------------------|
| 22. | 13962-78A70 | Hose: Turbocharger Outlet |
| 23. | 09402-50511 | Clamp |
| 24. | 09402-57511 | Clamp |
| 25. | 13980-60H150 | Pipe: Drain |
| 26. | 01550-06123 | Bolt |
| 27. | 13924-78A50 | Hose: Air Bypass Outlet |
| 28. | 09401-23405 | Clip |
| 29. | 18117-60H80 | Valve: 3-Way Solenoid |
| 30. | 18119-78A50 | Valve: Air Bypass |
| 31. | 01550-06253 | Bolt |
| 32. | 09355-35754-601 | Hose: 3.5x7.5x601 |
| 33-1. | 09355-35754-601 | Hose: 3.5x7.5x601 |
| 34.-37. | 09355-35754-601 | |
| 38. | 09401-06405 | Clip |
| 39. | 09408-00035 | Clip |
| 40. | 09367-04002 | 3-Way Joint |
| 41. | 95569-78040 | Check Valve |
| 42. | 09404-08207 | Clamp L:97 |
| 43. | 01550-06123 | Bolt |

Turbocharger (Turbo)

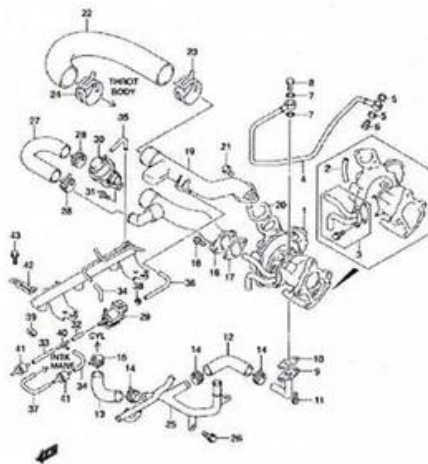

- | | | |
|------|-------------|----------------------------|
| 1-1. | 13900-78A53 | Turbocharger (Truck) |
| 1-2. | 13900-60H62 | Turbocharger (Van) |
| 2-1. | 13913-78A50 | Hose: Wastegate (T) |
| 2-2. | 13913-60H60 | Hose: Wastegate (V) |
| 3-1. | 13919-78A50 | Pipe Set: Water (T) |
| 3-2. | 13919-60H60 | Pipe Set: Water (V) |
| 4-1. | 13930-78A51 | Pipe: Turbo Oil Intake (T) |
| 4-2. | 13930-60H60 | Pipe: Turbo Oil Intake (V) |
| 5. | 09161-10009 | Washer 10x15x1.5 |
| 6-1. | 09360-10049 | Union Bolt (T) |
| 6-2. | 09360-10031 | Union Bolt (V) |
| 7. | 09168-08016 | Gasket: 8.2x14x1 |
| 8. | 13948-76G50 | Union Bolt |
| 9. | 13940-60H50 | Oil Drain Joint |
| 10. | 13945-70G50 | Gasket: Drain |
| 11. | 07120-06163 | Bolt |
| 12. | 13946-60H50 | Hose: Oil Drain No.1 |
| 13. | 13947-78A50 | Hose: Oil Drain No.2 |
| 14. | 09401-18404 | Clip |
| 15. | 09401-20404 | Clip |
| 16. | 13950-78A50 | Pipe: Turbo Inlet |
| 17. | 13955-56F00 | Gasket |
| 18. | 01550-06253 | Bolt |
| 19. | 13960-60H51 | Pipe: Outlet |
| 20. | 13695-56F00 | Gasket: Outlet |
| 21. | 01550-06853 | Bolt |

Turbocharger (Turbo)

Conversion Charts

CONVERSION OF TORQUE					
Convert			Convert		
From	To	Multiply	From	To	Multiply
lb.in.	oz.in.	16	oz.in.	lb.in.	.0625
lb.in.	lb.ft.	.08333	lb.ft.	lb.in.	12
lb.in.	kg.cm.	1.1519	kg.cm.	lb.in.	.8681
lb.in.	kg.m.	.011519	kg.m.	lb.in.	86.81
lb.in.	Nm	.133	Nm	lb.in.	8.85
lb.in.	dNm	1.13	dNm	lb.in.	.885
lb.ft.	kg.m.	.1382	kg.m.	lb.ft.	7.236
lb.ft.	Nm	1.356	Nm	lb.ft.	.7376
Nm	dNm	10	dNm	Nm	.10
Nm	kg.cm.	10.2	kg.cm.	Nm	.09807
Nm	kg.m.	.102	kg.m.	Nm	9.807

Thank you!

For More Information on other fine publications check the following resources.

www.lulu.com

www.amazon.com

Automotive Specialty

www.yokohamamtors.com

Automotive Service Manuals

Suzuki

Subaru

Honda

Mitsubishi

Daihatsu

Toyota

Nissan

Others

The Complete F6A Engine Overhaul & Parts Manual

**VIN Decoding
Engine Identification
Service Data
Intake Manifolds (Turbo-Fuel Injected-Carbureted)
Timing Belt
Valve Adjustments
Oil System & Pump Overhaul
Cylinder Head Overhaul
Pistons-Connecting Rods-Camshaft Specifications
Bearings & Crankshaft
Cylinder Block Specifications & Part Numbers
Engine Mounts & Frame Diagrams
Complete Engine Part Number Guide**

All this and more in the new Second Edition Version!

**Service & Parts Manual
Second Edition**

**DE51V
DF51V
DC51T
DD51T
DC51B
DA52T
DB52T
DA52V**